

DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev

Volodymyr Dahl East Ukrainian National University, Department of Logistics Management and Traffic Safety in Transport, 59-a, Central Ave., Sievierodonetsk, 93400, Ukraine, medvedev.ep@gmail.com

Dmitriy Muzylyov

Kharkiv Petro Vasylenko National Technical University of Agriculture, Department of Transport Technology and Logistics, 44, Alchevskiyh St., Kharkiv, 61002, Ukraine, murza_1@ukr.net

Natalya Shramenko

Kharkiv Petro Vasylenko National Technical University of Agriculture, Department of Transport Technology and Logistics, 44, Alchevskiyh St., Kharkiv, 61002, Ukraine, and too
Ukrainian State University of Railway Transport, Department of Operational Work Management, 7, Feierbakh Square, Kharkiv, 61000, Ukraine, nshramenko@gmail.com

Pavlo Nosko

National Aviation University, Mechanical Engineering Department, 1, Lubomir Husar Ave., Kyiv, 02000, Ukraine, nosko_p@ukr.net

Peter Eliseyev

Volodymyr Dahl East Ukrainian National University, Department of Machine Science and Industrial Enterprises Equipment, 59-a, Central Ave., Sievierodonetsk, 93400, Ukraine, peter_eliseyev@ukr.net

Vitalii Ivanov

Sumy State University, Department of Manufacturing Engineering, Machines and Tools, 2, Rymyskogo-Korsakova St., Sumy, 40007, Ukraine, ivanov@tmvi.sumdu.edu.ua (corresponding author)

Keywords: fuzzy logic, transportation, terms, harvesting and transport complex, fuzzification, membership function

Abstract: The study is aimed to develop the logic-linguistic models to design a number of rules for the correct calculation of the vehicles needed, taking into account the technical, technological, and weather and climate conditions of the harvesting and transport complex. The article has shown that the construction of the design of logic-linguistic models was not performed earlier to solve the problem of the agro-industrial production transportation support, considering the opportunity of forecasting size of influences of the weather and climatic factors on improving the productivity of the harvesting and transport complex elements. It is determined that the experience of applying the fuzzy logic theory in many practice situations confirms the universality of the mathematical apparatus. This toolkit provides better results than classical approaches (set theory, probability theory). This aspect indicates the expediency of the chosen mathematical apparatus for solving the tasks. The article using fuzzy logic explores the relationship and interdependence of technical, technological factors and weather and climate conditions for modeling transport support in harvesting and transport complex. Fuzzification of the parameters is carried out, based on the compiled equations using trapezoidal and triangular membership functions. The set of rules necessary for the creation of logical-linguistic models (LLM) for each factor has been arranged. LLMs were developed for dependent parameters, which will allow further modeling of the transport support of the harvesting and transport complex in the Fuzzy Logic Toolbox application of the MATLAB package.

1 Introduction

Transport support in agriculture, as in other industries, plays a key role. The consumer price of products largely depends on the efficiency planing of the transportation process. This is because the share of the cost of transportation is 20-30% of the final cost [1,2]. This trend is especially clearly seen in the delivery of agricultural goods during harvesting.

This period is characterized by the intensification of the use of rolling stock and harvesting equipment (combines, tractors, etc.). Therefore, the complexity of the

organization of transport services at a sufficient quality level increases. In this case, the main factor for improving the reliability of the logistics system is the accuracy of determining the required number of trucks for the transportation of agricultural goods.

Based on the practice of functioning and interaction of the harvesting and transport complex (HTC) elements during the harvest, there is a problem of ensuring uninterrupted operation between harvesting equipment and vehicles. There is an option to solve this problem by applying standard technological solutions [3,4]. It is

DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

possible to take into account technological aspects using probabilistic approaches [5-8], as well as risk theory [9]. However, in order to properly plan the operation of the harvesting and transport complex, it is necessary to predict the harvesting time and possible timing. To do this, the model should include parameters that take into account weather and climatic conditions.

Therefore, the use of fuzzy logic to build logical-linguistic models is the most correct. Indeed, the application of this approach allows fully reducing the fuzziness in the system under consideration, which will allow us to determine the required number of trucks with a smaller error for various scenarios than with the use of probability theory [10].

The study aims to develop the logical and linguistic models that allow creating a set of rules for the correct calculation of the necessity of the vehicle, taking into account the technical, technological, and weather and climatic conditions of the harvesting and transporting complex.

2 Literature Review

The experience of using fuzzy logic in logistics and transport systems proves the appropriateness of using this mathematical apparatus when it is necessary to consider fuzzy parameters during model building.

One of the first problems that were successfully solved using the fuzzy logic apparatus were tasks in the medical field. Today, this issue is also significantly reflected in modern research, additionally using neural-network models [11]. Similar approaches are used in logistics and to improve the functioning of various types of transport systems.

Fuzzy logic has been successfully applied to increase the safety of vehicles on the road network sections in the settlements [12] at the beginning of the 21st century. Several works were carried out in the area of smart transport systems, where the issues of timely determination of congestion [13,14] and general problems of managing saturated traffic flows were solved, using the hierarchy method to assess the different levels of control [15,16]. Another practical area of application of fuzzy logic, according to the results of research in the sphere of road transport, is designing an evolutionary-type model for the prediction of possible traffic accidents in city networks [17].

The next study was based on an approach that would maximize profits when planning the transportation of solid materials using pipelines. The solution to the problem was made possible by creating a new design of fuzzy logic systems (IT2FLS) type interval 2 [18].

Separately, it is worth noting the use of the fuzzy logic apparatus in solving the multiobjective nonlinear transportation problem (MNOTP), where the weighting coefficients of the membership functions are presented particularly [19]. Fuzzy logic is also used in large-scale research, for example, in determining the overall level of

security of transport infrastructure. It can be done only by fixing the uncertainty of environmental threats the transport infrastructure faces, as well as its resistance to damage and the consequences of damage [20]. Such approaches are often used in the absence of the possibility of obtaining the necessary statistics or complete lack of data.

Often the fuzzy models are used to organize traffic routes of various modes of transport: automobile [21,22], rail transportation [23], and ship navigation [24]. Routing aspects are important enough to determine the best option for transport support of any industry [25]. An innovative solution to this problem was the use of a modified ant algorithm [26]. It should be noted that when building a supply chain that includes a distribution center, a fuzzy theory application is also possible [27].

As for the issues of transport support for the agricultural sector, these tasks were considered using the fuzzy logic apparatus of the fleet of vehicles, primarily involved in harvesting [28]. A similar study was conducted to optimize the work of the farm in growing tomatoes [29]. The fundamental research in terms of the transport process planning in agriculture was a study designed to solve the main transportation problems by adjusting the membership functions to the specifics of the system under study. In this case, only three factors were considered that were associated only with the technical aspects of transportation [30].

When planning the delivery of agricultural products, the key role is played by the issues of coordinated work of harvesting and transport equipment. At the same time, ensuring coordinated interaction can be achieved using the theory of fuzzy sets and neural networks to obtain accurate forecasts in difficult to predict operating conditions. From this point of view, studies were conducted for determining the transshipment volumes of grain in logistics systems [31-32], as well as the calculation of demand in ports of departure depending on soybean production [33]. Moreover, according to studies, in general, supply chain management should be based on the use of models with the necessary data coverage [34]. A similar sample is shown when constructing supply chain options for the delivery of grain cargo by three transport modes [35]. However, a classical approach is presented here, using the Petri nets apparatus, which does not always allow finding an unambiguous optimum.

Regardless of the specifics of the fuzzy logic apparatus application, the key aspect was the correctness of the formulation of many terms and, as a result, the correctness of constructing a logical-linguistic model (LLM). In the paper [36] an example of the logical-linguistic models' development with the programming languages using the classical Zadeh theory is shown.

It should be noted that LLMs are used along with mathematical ones and are the most productive for the efficient presentation of data. Based on logical-linguistic models, it is possible to implement the creation of an



DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

intelligent interface of computer programs and the operating system as a whole [37].

The logical-linguistic models are the most acceptable type of models used in intelligent systems for processing complex structures of diverse types of data and knowledge. A typical example of the LLM is the concept that reflects the laws inherent in classes of objects [38].

The information sources and scientific literature analysis showed that the construction of the logical and linguistic model was not carried out earlier for the transport support of agricultural production, considering the results of forecasting values of the weather and climate factors influence on improving the efficiency of the HTC elements functioning.

The diversity of the fuzzy logic theory application testifies to the universality of the mathematical apparatus, which, when solving various problems, shows better results than classical approaches. Therefore, this is another proof of the relevance of the selected tools for solving the given tasks.

3 Research Methodology

3.1 Research tasks

To achieve the goal, a research structure has been developed, according to which must be resolved the next problems:

1. Segregation of the future model parameters into dependent and independent according to the formed logical chains;

2. Definition of the influential dependent parameters and those affected by the system elements;

3. Formation of the logical chains that show the interconnection and interdependence of the parameters when modeling the transportation support for the HTC;

4. Assignment of terms for each term-set of linguistic variables;

5. Fuzzification for each system parameter;

6. Development of logical-linguistic models. Adjustment of the set of rules for each model.

The final step is the result of this study. At the same time, the constructed logical-linguistic models with the formed individual set of rules will act as initial information at the next stage of the study - computer simulations using the Fuzzy Logic Toolbox profile package in the MATLAB simulation shell.

3.2 Parameters classification

The classification of parameters was performed in order to develop a matrix for constructing logical chains. At the same time, an object-independent approach is practiced. It involves a third-party assessment of the objects presented for classification. They should be assessed objectively, which is possible with the involvement of independent experts [39-41]. As a result, dependent and independent parameters are highlighted. Independent parameters are marked with “-” and dependent parameters are marked with “+”. The results are presented in Table 1.

Table 1 Classification of dependent and independent parameters

| Dependent parameter “+” | Independent factors “-” |
|-----------------------------------|--|
| Soil condition | Rain |
| | Dew |
| Crop productivity | Hail |
| Crop moisture | Field size |
| Lodging | Soil moisture content |
| Quantity of harvesters | Harvester header width |
| Harvester speed | Road type |
| Harvester efficiency | Load capacity of vehicles (trucks) |
| Quantity of vehicles (trucks) | Distance from field to the threshing-floor |
| Vehicles (trucks) operating speed | |
| Vehicles (trucks) turnover time | |
| Method of harvesting | |

The presented classification fully reflects the objective opinion of various expert groups on the degree of influence or independence of each parameter from the set of proposed factors. Table 1 allows establishing the influence levels of both dependent factors and independent ones. This will allow us to more correctly formulate the future

logical-linguistic model, which in the conditions of fuzziness makes it possible to reduce the error in obtaining the final result – the number of vehicles involved in the transport support.

DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

3.3 Definition of influence levels of independent to dependent parameters

The classification of the basic conditions for the HTC operation and consideration of the experts' recommendations made it possible to identify the levels of the interdependence of parameters. Thanks to this aspect, it is possible to determine the dependence of the studied

factors. It should be noted that the dependence of the parameters will occur both in the context of "dependent parameters – independent parameters", and in the logical chain "dependent parameters – dependent parameters". Dependent parameters are listed, and their dependence on independent parameters is indicated (Table 2):

Table 2 Influence levels of independent to dependent parameters

| Independent factors which influence | Influenced dependent parameters |
|--|--|
| Rain | Soil condition |
| | Crop moisture |
| | Lodging |
| | Vehicles (trucks) operating speed |
| Dew | Crop moisture |
| Hail | Lodging |
| Field size | Quantity of trucks |
| Soil moisture content | Soil condition |
| Combine header width | Combine efficiency |
| Road type | Vehicles (trucks) operating speed |
| Load capacity of vehicles (trucks) | Vehicles (trucks) turnover time |
| Distance from field to the threshing-floor | Vehicles (trucks) turnover time |

Based on Table 2, we can conclude that the most significant (from the point of view of the number of influence levels) is the independent parameter "Rain". This factor affects four elements of the system under study. Therefore, when constructing logical chains, "Rain" should be reflected in the largest number of them.

Similarly, the study performed the formation of levels of interconnections in the logical chain "dependent parameters – dependent parameters". The results of the procedure were reflected in the development of the final logical chains presented in the matrix (Table 3).

3.4 Formation of logical chains

When developing future logical-linguistic models, it is important to pay attention to the primary technological, technical, and weather-climatic aspects in which the transport support of the harvesting and transport complex takes place [42,43]. For this, matrix-forming logical chains were created (Table 3).

Based on Table 1, three alternatives for constructing logical chains are identified, which are built on, apart from

the technical and technological aspects of the HTC operation, weather, and climatic factors. The latter primarily affect the start time of the harvesting and its duration, which ultimately determines the quantitative need for rolling stock. Moreover, the largest number of construction chains are based on the weather conditions of the harvesting and transport complex. This will naturally affect the construction of logical-linguistic models in subsequent stages.

3.5 Definition of fuzzy term-sets and finding values of linguistic variables

The preparatory stage should be carried out in order to complete the fuzzification (the transition from a clear set to a fuzzy one) [44]. It consists of the development of term sets for each model and, accordingly, the definition of the values of linguistic variables for a particular term. The results of the procedure are presented in Table 4 for independent factors.

The results of parametric identification are performed for dependent factors in Table 5.

DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

Table 3 Matrix of logical chains for design linguistic models

| Kind of factor | Initial parameter | Transit chain | Result |
|--|--|---|--------------------|
| Weather conditions | Rain | Lodging-method of harvesting-harvester speed-harvester efficiency-quantity of harvesters | Quantity of trucks |
| | | Soil condition- harvester speed-harvester efficiency-quantity of harvesters | |
| | | Lodging- crop productivity-quantity of harvesters | |
| | Hail | Vehicles (trucks) operating speed-vehicles (trucks) turnover time- quantity of harvesters | Quantity of trucks |
| | | Lodging-method of harvesting-harvester speed-harvester efficiency-quantity of harvesters | |
| | Dew | Lodging- crop productivity-quantity of harvesters | Quantity of trucks |
| Crop moisture-method of harvesting-harvester speed-harvester efficiency-quantity of harvesters | | | |
| Technical aspects | Soil moisture content | Crop moisture- crop productivity-quantity of harvesters | Quantity of trucks |
| | Harvester header width | Soil condition-harvester speed-harvester efficiency-quantity of harvesters | Quantity of trucks |
| | Load capacity of vehicles (trucks) | Harvester efficiency-quantity of harvesters | Quantity of trucks |
| Technological aspects | Road type | Vehicles (trucks) turnover time-quantity of harvesters | Quantity of trucks |
| | Distance from field to the threshing-floor | Vehicles (trucks) operating speed-vehicles (trucks) turnover time-quantity of harvesters | Quantity of trucks |
| | Field size | Vehicles (trucks) turnover time-quantity of harvesters | Quantity of trucks |
| | Field size | Quantity of combine harvesters | Quantity of trucks |

It should be noted that to highlight the values of linguistic variables, both expert recommendations and mathematical expediency were used at the same time. The latter refers to the minimum possible allocation of the number of ranges (terms) by the factor to prevent the massiveness of the final model. Indeed, this can reduce the speed of calculations or lead to the inability to experiment as a whole.

3.6 Parameter system fuzzification and designing of membership functions

The next step is the process of fuzzification of system parameters. Thanks to this procedure, it is possible to convert fuzzy parameter values to linguistic truth-values [45].

A comparative assessment between membership functions has shown that triangular and trapezoid membership functions will best represent dependencies. A similar type of function is often used in solving logistic problems. Confirmation of this is one of the latest studies performed when choosing a route in the formation of the supply chain in fisheries [46].

Fuzzification was performed for all dependent and independent parameters using the classical approaches of

the theory of fuzzy logic,. As an example, this article discusses a procedure based on the logical link “Dew” (independent factor) “Crop moisture” (dependent factor). The choice of this pair is because the independent factor (“Dew”) is harder to predict than the three aspects of the considered weather and climate conditions. In this case, the dependent parameter (“Crop moisture”) plays a key role in choosing the start time of the harvest and the total duration of the harvesting and transport complex, at which the harvested crop will be of the best quality.

Triangular and trapezoidal membership functions are the simplest, according to the research study [47]. These functions are formed using the piecemeal-linear approximation. The trapezoidal membership function is a generalization of triangular function. It allows you to specify the core of a fuzzy set in interval form. Following convenient interpretation is possible in case of trapezoidal membership function: a core of a fuzzy set is an optimistic estimate; fuzzy set carrier – pessimistic evaluation. Triangular and trapezoidal membership functions are most widely used in practical applications according to the work of prof. Rothstein [48]. These two studies explain why such types of membership functions are expediently for using during the experiment.

DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

Fuzzification for the parameter “Dew” will take the following form (Figure 1).

Table 4 Terms and values of linguistic variables for independent parameters

| Parameters / conditions | Term | Index |
|--|-----------------------|----------------|
| Rain | Lingering | 10-20 mm |
| | Heavy | 10 mm |
| | Short term | 5 mm |
| Dew | Long | 7 hr |
| | Moderate | 5 hr |
| | Short-term | 2 hr |
| Hail | Heavy | 10 mm |
| | Moderate | 5 mm |
| | Small | 2-3 mm |
| Field size | Large | 500 ha |
| | Medium | 200-300 ha |
| | Small | 100 ha |
| Relative soil wetness | High | 61,8 % |
| | Moderate | 50 % |
| | Low | 44 % |
| Header width | Large | 11 m |
| | Medium | 7-10 m |
| | Small | 3-6 m |
| Road type | With improved coating | 51-60 km/h |
| | Grader | 35-50 km/h |
| | Steppe | 18-35 km/h |
| | Field | 12-18 km/h |
| Load capacity | High | 20 t |
| | Higher than average | 10-12 t |
| | Average | 5-7 t |
| | Low | 3 t |
| Distance from field to threshing floor | Long | 40 km and more |
| | Higher than average | 20-35 km |
| | Medium | 10-19 km |
| | Short | 2-9 km |

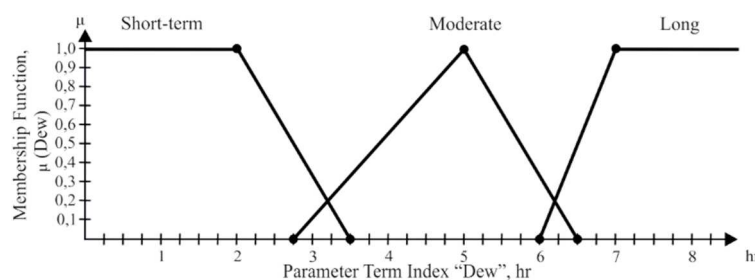


Figure 1 Graphic of fuzzification result for independent parameter 'Dew'

A calculation was also performed for trapezoidal and triangular membership functions $\mu(u)$ for the parameter “Dew”.

DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

Table 5 Terms and values of linguistic variables for dependent parameters

| Parameters / conditions | Term | Index |
|---|---------------------|------------------|
| Soil Condition | Satisfactory | Dry |
| | Unsatisfactory | Wet |
| Crop productivity | The highest | 50 c/ha and more |
| | Medium | 37,5 c/ha |
| | Lowest | 25 c/ha and less |
| Crop Moisture | High | 25 % and more |
| | Medium | 18 % |
| | Normal | 16 % |
| Lodging | High | <25 % |
| | Medium | <15 % |
| | Low | 5 % |
| Number of Combine Harvesters | High | 5 units and more |
| | Medium | 3-4 units |
| | Low | 2 units |
| Combine Harvester Speed | High | 10 km/h |
| | Normal | 5-7 km/h |
| | Low | 2-3 km/h |
| Combine efficiency | High | 5,5 ha/h |
| | Medium | 4,5 ha/h |
| | Low | 3 ha/h |
| Number of transport means | Above normal | 6 units and more |
| | Normal | 3-5 units |
| | Insufficient | 2 units |
| Vehicles (Automobile) Operational Speed | High | 51-60 km/h |
| | Higher than average | 35-50 km/h |
| | Average | 18-35 km/h |
| | Low | 12-18 km/h |
| Vehicles (Automobile) Time of Turnover | Fast | 10-20 min |
| | Satisfactorily | 21-40 min |
| | Slow | 41-60 min |
| Harvesting Method | Direct | 1 |
| | Separate | 0 |

$$\mu(u) = \begin{cases} 0, & u \leq 0 \text{ if } u \geq 3,5 \\ 1, & 0 \leq u \leq 2 \\ \frac{3,5-u}{3,5-2} = \frac{3,5-u}{1,5}, & 2 \leq u \leq 3,5 \end{cases}$$

$$(1) \quad \mu(u) = \begin{cases} 0, & u \leq 2,75 \text{ if } u \geq 6,5 \\ \frac{u-2,75}{5-2,75} = \frac{u-2,75}{3}, & 2,75 \leq u \leq 5 \\ \frac{6,5-u}{6,5-5} = \frac{6,5-u}{1,5}, & 5 \leq u \leq 6,5 \end{cases} \quad (2)$$

DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

$$\mu(u) = \begin{cases} 1, & 7 \leq u \leq 8,5 \\ \frac{u-6}{7-6} = \frac{u-6}{1}, & 6 \leq u \leq 7 \end{cases} \quad (3)$$

where u – considered fuzzy parameter; $\mu(u)$ – membership function.

Fuzzification for the “Crop moisture” parameter is shown in Figure 2.

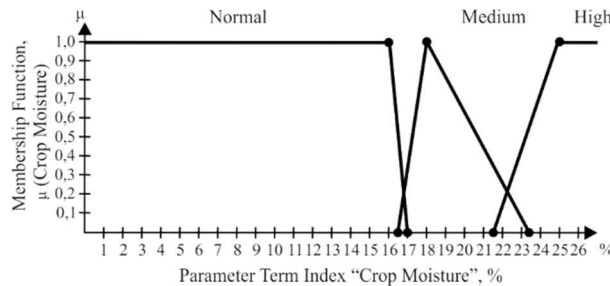


Figure 2 Graphic of fuzzification result for independent parameter “Crop moisture”

Similarly to the “Dew” factor, the membership functions were calculated $\mu(u)$ for “Crop moisture”.

$$\mu(u) = \begin{cases} 0, & u \leq 0 \text{ if } u \geq 17 \\ 1, & 0 \leq u \leq 16 \\ \frac{17-u}{17-16} = \frac{17-u}{1}, & 16 \leq u \leq 17 \end{cases} \quad (4)$$

$$\mu(u) = \begin{cases} 0, & u \leq 16,5 \text{ if } u \geq 23,25 \\ \frac{u-16,5}{18-16,5} = \frac{u-16,5}{1,5}, & 16,5 \leq u \leq 18 \\ \frac{23,25-u}{23,25-18} = \frac{23,25-u}{5,25}, & 18 \leq u \leq 23,25 \end{cases} \quad (5)$$

$$\mu(u) = \begin{cases} 1, & 25 \leq u \leq 27 \\ \frac{u-21,5}{25-21,5} = \frac{u-21,5}{3,5}, & 21,5 \leq u \leq 25 \end{cases} \quad (6)$$

The presented example allows building a logical-linguistic model of the dependent variable “Crop moisture”. The fuzzification procedure was carried out similarly for the other factors of the functioning of transport services during the harvesting period described in Section 3.1.

4 Results and Discussion

Eleven logical-linguistic models were built as a result of the study. At the same time, for example, the fuzzy mathematical model of “Crop moisture” in the form of a linguistic model consists of 9 rules and will take the following form:

$$\left\{ \begin{array}{l} \text{IF "Rain Short term"} \rightarrow \text{THEN "Crop moisture Normal"} \\ \text{IF "Rain Heavy"} \rightarrow \text{THEN "Crop moisture Medium"} \\ \text{IF "Rain Lingering"} \rightarrow \text{THEN "Crop moisture High"} \\ \text{IF "Dew Short term"} \rightarrow \text{THEN "Crop moisture Normal"} \\ \text{IF "Dew Moderate"} \rightarrow \text{THEN "Crop moisture Medium"} \\ \text{IF "Dew Long"} \rightarrow \text{THEN "Crop moisture High"} \\ \text{IF "Dew Short term"} \rightarrow \text{AND "Rain Short term"} \rightarrow \text{THEN "Crop moisture Normal"} \\ \text{IF "Dew Moderate"} \rightarrow \text{AND "Rain Heavy"} \rightarrow \text{THEN "Crop moisture Medium"} \\ \text{IF "Dew Long"} \rightarrow \text{AND "Rain Lingering"} \rightarrow \text{THEN "Crop moisture High"} \end{array} \right. \quad (7)$$

The final table with a set of rules for each of the 11 developed logical-linguistic models can be represented as follows (Table 6).

DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

Table 6 Resulting table with rules quantities for each logical linguistic model

| Fuzzy logical linguistic model | Rules quantity |
|-----------------------------------|----------------|
| Soil condition | 9 |
| Crop productivity | 3 |
| Crop moisture | 9 |
| Lodging | 9 |
| Quantity of harvesters | 15 |
| Harvester speed | 4 |
| Harvester efficiency | 11 |
| Quantity of vehicles (trucks) | 6 |
| Vehicles (trucks) operating speed | 6 |
| Method of harvesting | 11 |
| Vehicles (trucks) turnover time | 15 |

Table 6 shows that the most cumbersome is LLM, which determines the technology of the transportation process and the harvesting equipment operation. These models consist of 15 rules, which makes it necessary to take into account more conditions when calculating the number of harvesting combines needed, as well as planning the turnover time for trucks involved directly in the transportation of the HTC. Therefore, in order to avoid the disruptions in possible operation, these two indicators should be agreed upon to exclude both the downtime of the combine waiting for the truck and, conversely, the formation of a queue of empty trucks near the field.

5 Conclusion

The paper studies the interconnections and interdependencies of the technical, technological factors and weather and climate conditions for further modeling of the transport support for the harvesting and transport complex. A classification is made with finding mutual influence between the variables of the system under study. Based on this, the matrix of logical chains between the parameters (weather, climate, technical, and technological) is developed.

The process of assigning terms to each of the dependent and independent parameters was carried out, and the values of linguistic variables were assigned. Parameters were fuzzified based on the equations made using trapezoidal and triangular membership functions. The set of rules necessary for creating logical-linguistic models (LLM) for each factor has been compiled.

The logical-linguistic models have been developed to solve the problem of transport support for agro-industrial production, considering the opportunity to forecast values of the weather and climatic factors that influence the efficiency increase of the harvesting and transport complex elements functioning.

The developed LLM for dependent parameters will allow further modeling of the transport support of the harvesting and transport complex in the Fuzzy Logic Toolbox application in the MATLAB package. According to the results, you can get a set of rules for all the elements of the fuzzy system, in which the required number of trucks

is more accurately calculated under various, even the most implicit, conditions of operation of the HTC.

Acknowledgment

The authors express their gratitude to Vasyl Hromyak, Ph.D. (Agricultural Sciences), Associate Professor, Head of Laboratory of Protection and Rational Use of Lands National Scientific Center «Institute for Soil Science and Agrochemistry Research named after O.N. Sokolovsky.

References

- [1] MUZYLYOV, D., SHRAMENKO, N., SHRAMENKO, V.: Integrated business-criterion to choose a rational supply chain for perishable agricultural goods at automobile transportations, *International Journal of Business Performance Management*, Vol. 21, No. 1/2, pp. 166-183, 2020. doi:10.1504/IJBPM.2020.10027634
- [2] SHRAMENKO, N., MUZYLYOV, D., HRAMENKO, V.: Methodology of costs assessment for customer transportation service of small perishable cargoes, *International Journal of Business Performance Management*, Vol. 21, No. 1/2, pp. 132-148, 2020. doi:10.1504/IJBPM.2020.10027632
- [3] MUZYLYOV, D., SHRAMENKO, N.: Mathematical Model of Reverse Loading Advisability for Trucks Considering Idle Times. In: Karabegović I. (eds) *New Technologies, Development and Application III*. NT 2020, *Lecture Notes in Networks and Systems*, Vol. 128, pp. 612-620, Springer, Cham, 2020. doi:10.1007/978-3-030-46817-0_71
- [4] STRAKA, M., LENORT, R., KHOURI, S., FELIKS, J. Design of Large-Scale Logistics Systems using Computer Simulation Hierarchic Structure, *International Journal of Simulation Modelling*, Vol. 17, No. 1, pp. 105-118, 2018. doi:10.2507/ijssimm17(1)422
- [5] MAKAROVA, I., SHUBENKOVA, K., MAVRIN, V., MUKHAMETDINOV, E., BOYKO, A., ALMETOVA, Z., & SHEPELEV, V.: Features of Logistic Terminal Complexes Functioning in the Transition to the Circular Economy and Digitalization,



DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

- Explorations in Technology Education Research. In: Śladkowski A. (eds) Modelling of the Interaction of the Different Vehicles and Various Transport Modes, Lecture Notes in Intelligent Transportation and Infrastructure, Springer, Cham, pp. 415-527, 2019. doi:10.1007/978-3-030-11512-8_10
- [6] KABASHKIN, I.: Heuristic Based Decision Support System for Choice of Alternative Routes in the Large-Scale Transportation Transit System on the Base of Petri Net Model, *Procedia Engineering*, Vol. 134, pp. 359-364, 2016. doi:10.1016/j.proeng.2016.01.020
- [7] GATH, M.: *Optimizing Transport Logistics Processes with Multiagent Planning and Control*, Book, Mobile Research Center, Bremen, Germany, 2016. doi:10.1007/978-3-658-14003-8
- [8] STRAKA, M., HRICKO, M. Software System Design for Solution of Effective Material Layout for the Needs of Production and Logistics, *Wireless Networks*, 2020. doi:10.1007/s11276-020-02267-6
- [9] WANG, Y.-L., & YANG, D.-L.: *A Heuristic Method for Logistics Supply Chain Coordination and Risk Control*, 2006 5th IEEE International Conference on Cognitive Informatics, pp. 866-870 (2006). doi:10.1109/coginf.2006.365605
- [10] MEDVEDIEV, IE., LEBID, I., ELISEYEV, P.: Rationale for Fuzzy Logic Toolbox applying in transport processes for wheat harvesting. *Technical service of agriculture, forestry and transport systems*, No. 11. Pp. 269-279, 2018. (Original in Ukrainian)
- [11] OLIINYK, A., SUBBOTIN S. A.: The decision tree construction based on a stochastic search for the neuro-fuzzy network synthesis, *Optical Memory and Neural Networks (Information Optics)*, Vol. 24, No 1, pp. 18-27, 2015. doi:10.3103/S1060992X15010038
- [12] NARANJO, J.E., GONZÁLEZ, C., GARCÍA, R., DE PEDRO, T.: Fuzzy Logic for Transportation Guidance: Developing Fuzzy Controllers for Maintaining an Inter-Vehicle Safety Headway, In: Bai Y., Zhuang H., Wang D. (eds) *Advanced Fuzzy Logic Technologies in Industrial Applications*, Advances in Industrial Control. Springer, London, pp. 129-143, 2006. doi:10.1007/978-1-84628-469-4_9
- [13] KALINIC, M., & KRISP, J. M.: Fuzzy inference approach in traffic congestion detection, *Annals of GIS*, Vol. 25, No. 4, pp. 329-336, 2019. doi:10.1080/19475683.2019.1675760
- [14] UGWU, C., BALE, D.: An application of fuzzy logic model in solving road traffic congestion, *International Journal of Engineering Research & Technology*, Vol. 3, No. 2, 2014.
- [15] VASSILYEV, S. N., KELINA, A. Y., KUDINOV, Y. I., & PASHCHENKO, F. F.: Intelligent Control System, *Procedia Computer Science*, 103, pp. 623-628, 2017. doi:10.1016/j.procs.2017.01.088
- [16] ACHARYA, S., DASH, K.K., CHAINI, R.: Fuzzy Logic: An Advanced Approach to Traffic Control. In: Nayak J., Balas V., Favorskaya M., Choudhury B., Rao S., Naik B. (eds) *Applications of Robotics in Industry Using Advanced Mechanisms*, ARIAM 2019, Learning and Analytics in Intelligent Systems, Vol 5. Springer, Cham, pp. 176-186, 2020. doi:10.1007/978-3-030-30271-9_17
- [17] NIKOLAEV, A.B., SAPEGOA, YU.S., JAKUBOVICH. A.N., BERNERB, L.I., STROGANOV, V. YU.: Fuzzy Algorithm for the Detection of Incidents in the Transport System, *International Journal of Environmental & Science Education*, Vol. 11, No. 16, pp. 9039-9059, 2016.
- [18] SAHOO, P., JANA, D.K., PANIGRAHI, G.: Interval Type-2 Fuzzy Logic and Its Application to Profit Maximization Solid Transportation Problem in Mustard Oil Industry, In: Castillo O., Jana D., Giri D., Ahmed A. (eds) *Recent Advances in Intelligent Information Systems and Applied Mathematics. ICITAM 2019, Studies in Computational Intelligence*, Vol. 863. Springer, Cham, pp. 18-29, 2020. doi:10.1007/978-3-030-34152-7_2
- [19] DALMAN, H., SIVRI, M. A.: *Fuzzy Logic Based Approach to Solve Interval Multiobjective Nonlinear Transportation Problem*, Proceedings of the National Academy of Sciences, India Section A: Physical Sciences, 89, pp. 279-289, 2019. doi:10.1007/s40010-017-0469-z
- [20] DOJUTREK, M.S., LABI, S., DIETZ, J.E.: A Fuzzy Approach for Assessing Transportation Infrastructure Security, In: Boulanger F., Krob D., Morel G., Roussel JC. (eds) *Complex Systems Design & Management*, Springer, Cham, pp. 207-224, 2015. doi:10.1007/978-3-319-11617-4_15
- [21] NIAO-NA, Z., YI-BO, G.: Control Strategy for Hybrid Electric Vehicle Based on Fuzzy Logic, In: Jiang L. (eds) *Proceedings of the 2011 International Conference on Informatics, Cybernetics, and Computer Engineering (ICCE2011) November 19–20, 2011, Melbourne, Australia, Advances in Intelligent and Soft Computing*, Vol. 112. Springer, Berlin, Heidelberg, pp. 563-571, 2011. doi:10.1007/978-3-642-25194-8_68
- [22] SZOLYÁK, Z.: Reducing the environmental pollution on transport in cities, *Acta Technológica*, Vol. 5, No. 2, pp. 29-36, 2020. doi:10.22306/atec.v5i2.44
- [23] YURENKO, K.I., KHARCHENKO, P.A., FANDEEV, E.I., YURENKO, I.K.: Train Operation Control on-based of Logical-Linguistic Model, *EAI Endorsed Transactions on Energy Web*, 2019. doi:10.4108/eai.13-7-2018.156388
- [24] SEDOV V.A., SEDOVA, N.A., GLUSHKOV, S.V.: The fuzzy model of ships collision risk rating in a heavy traffic zone, *Vibroengineering PROCEDIA*, Vol. 8, pp. 453-458, 2016.
- [25] OSORIO-GÓMEZ, J.C., MANOTAS-DUQUE, D.F.: Fuzzy QFD and TOPSIS for Dispatching Prioritization in Maritime Transportation



DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

- Considering Operational Risk, In: García Alcaraz J., Rivera Cadavid L., González-Ramírez R., Leal Jamil G., Chong Chong M. (eds) Best Practices in Manufacturing Processes, Springer, Cham, pp. 97-116, 2019. doi:10.1007/978-3-319-99190-0_5
- [26] KHALIPOVA, N., PASICHNYK, A., LESNIKOVA, I., KUZMENKO, A., KOKINA, M., KUTIREV, V., KUSHCHENKO, YE.: Developing the method of rational trucking routing based on the modified ant algorithm, *Eastern-European Journal of Enterprise Technologies*, Vol. 1, No. 3 (91), pp. 68-76, 2018. doi:10.15587/1729-4061.2018.123862
- [27] SADOVNYCHYY A., SADOVNYCHYY S., PONOMARYOV V. Computational Intelligence Models of the Distributed Technological Complexes. Theoretical Advances and Applications of Fuzzy Logic and Soft Computing, *Advances in Soft Computing*, Vol. 42, pp. 230-239, 2007. doi:10.1007/978-3-540-72434-6_24
- [28] CIRIC, STOJIC, SEDLAK, MARCIKIC HORVAT, & KLEUT.: Innovation Model of Agricultural Technologies Based on Intuitionistic Fuzzy Sets, *Sustainability*, Vol. 11, No. 19, pp. 54-57, 2019. doi:10.3390/su11195457
- [29] APHALE, L.R., RAJESH, S.: *Fuzzy Logic System in Tomato Farming*. Proceeding of 4th - Somaiya International Conference on Technology and Information Management (SICTIM'18). IOSR Journal of Computer Engineering, Vol. 1/12, No. 20, pp. 56-62, 2018.
- [30] SARKAR, A.: Application of Fuzzy Logic in Transport Planning, *International Journal on Soft Computing*, Vol. 3, No. 2, pp. 1-21, 2012. doi:10.5121/ijsc.2012.3201
- [31] SHRAMENKO, N., MUZYLYOV, D.: Forecasting of Overloading Volumes in Transport Systems Based on the Fuzzy-Neural Model. Advances in Design, Simulation and Manufacturing II. In: Ivanov V. et al. (eds) DSMIE-2019, LNME, pp. 311-320. Springer Nature, 2020. doi:10.1007/978-3-030-22365-6_31
- [32] MUZYLYOV, D., SHRAMENKO, N.: Blockchain technology in transportation as a part of the efficiency in Industry 4.0 strategy, In: Tonkonogyi V. et al. (eds) Advanced Manufacturing Processes, InterPartner-2019. Lecture Notes in Mechanical Engineering, pp. 216-225. Springer, Cham, 2020. doi:10.1007/978-3-030-40724-7_22
- [33] ABRAHAM, E.R., DOS REIS, J.G.M., DE SOUZA, A.E., COLOSSETTI, A.P.: Neuro-Fuzzy System for the Evaluation of Soya Production and Demand in Brazilian Ports, In: Ameri F., Stecke K., von Cieminski G., Kiritsis D. (eds) Advances in Production Management Systems, Production Management for the Factory of the Future. APMS 2019, IFIP Advances in Information and Communication Technology, Vol. 566. Springer, Cham, pp. 87-94, 2019. doi:10.1007/978-3-030-30000-5_11
- [34] SOHEILIRAD, S., GOVINDAN, K., MARDANI, A. ET AL.: Application of data envelopment analysis models in supply chain management: a systematic review and meta-analysis, *Ann Oper Res* 271, pp. 915-969, 2018. doi:10.1007/s10479-017-2605-1
- [35] PAVLENKO, O., SHRAMENKO, N., MUZYLYOV, D.: Logistics Optimization of Agricultural Products Supply to the European Union Based on Modeling by Petri Nets, In: Karabegović I. (eds) New Technologies, Development and Application III. NT 2020, Lecture Notes in Networks and Systems, Vol. 128, pp. 596-604. Springer, Cham, 2020. doi:10.1007/978-3-030-46817-0_69
- [36] KOVAL, A.A.: Logical-linguistic models in fuzzy systems, *Programming problems*, Vol. 2018, No. 2-3, pp. 375-378, 2008. (Original in Ukrainian)
- [37] ZAIATC, V.M., ZAIATS, M.M.: Artificial intelligence systems are the basis of modern information technologies and their software, *Radioelectronics & Informatics Journal*, Vol. 2017, No. 3(78), pp. 33-41, 2017. (Original in Ukrainian)
- [38] VELYCHKO, V.JU., PALAGIN, O.V.: Methods of effectiveness increase of application of growing pyramidal networks. *Computer Tools, Networks and Systems*, Vol. 2010, No. 9, pp. 106-114, 2010. (Original in Ukrainian)
- [39] TVEREZOVSKAYA, N.T., NELEPOVA, A.V.: *Information technologies in agronomy*, Textbook, Ukraine, Kyiv, 2013. (Original in Ukrainian)
- [40] VAIČIŪTĖ, K., SKIRMANTIENĖ, J., DOMANSKA, L.: Assessment of Transport Specialists' Competencies in Transport/Logistics Companies, *Procedia Engineering*, Vol. 187, pp. 628-634, 2017. doi:10.1016/j.proeng.2017.04.423
- [41] YUAN, L., LI, J., LI, R. ET AL.: Mapping the evaluation results between quantitative metrics and meta-synthesis from experts' judgements: evidence from the Supply Chain Management and Logistics journals ranking, *Soft Computing*, Vol. 24, No. May, pp. 6227-6243, 2020. doi:10.1007/s00500-019-03837-3
- [42] MEDVEDIEV, I.E., LEBID, I., BRAGIN, M.: Assessment of the weather and climate conditions impact on the organization and planning of transport support for wheat harvesting, *TEKA of the Commission of Motorization and Energetics in Agriculture*, Vol. 17, No. 2, pp. 45-54, 2017.
- [43] AULIN, V., LYASHUK, O., PAVLENKO, O., VELYKODNYI, D., HRYNKIV, A., LYSENKO, S., HOLUB, D., VOVK, Y., DZYURA, V., SOKOL, M.: Realization of the logistic approach in the international cargo delivery system, *Communications - Scientific Letters of the University of Zilina*, Vol. 21, No. 2, pp. 3-12, 2019.



DESIGN LOGICAL LINGUISTIC MODELS TO CALCULATE NECESSITY IN TRUCKS DURING AGRICULTURAL CARGOES LOGISTICS USING FUZZY LOGIC

Ievgen Medvediev; Dmitriy Muzylyov; Natalya Shramenko; Pavlo Nosko; Peter Eliseyev; Vitalii Ivanov

- [44] HASHMI, N., JALIL, S.A. & JAVAID, S.: A model for two-stage fixed charge transportation problem with multiple objectives and fuzzy linguistic preferences, *Soft Computing*, Vol. 2019, pp. 12401-12415, 2019. doi:10.1007/s00500-019-03782-1
- [45] SUBBOTIN, S.O.: *Representation and processing of knowledge in the artificial intelligence and decision support systems*, Textbook, Ukraine, Zaporizhzhia, In: ZNTU, 2008. (Original in Ukrainian)
- [46] DJATNA, T., GINANTAKA, A.: Traceability of Information Routing Based on Fuzzy Associative Memory Modelling in Fisheries Supply Chain, *International Journal of Fuzzy Systems*, Vol. 22, pp. 724-734, 2020. doi:10.1007/s40815-019-00754-3
- [47] SHTOVBA, S.D.: *Design of fuzzy systems by means of Matlab*, Moscow, Hotline-Telecom, 2007. (Original in Russian)
- [48] ROTHSTEIN, A.P.: *Intelligent identification technologies: fuzzy logic, genetic algorithms, neural networks*, Ukraine, Vinnytsia, Universum-Vinnytsia, 1999. (Original in Russian)

Review process

Single-blind peer review process.

