

Maximum Transportation Growth in Energy and Solute Particles in Prandtl Martial across a Vertical 3D-Heated Surface: Simulations Achieved using by Finite Element Approach

Muhammad Bilal Hafeez^a, Marek Krawczuk^a, and Wasim Jamshed^b

^a Gdansk University of Technology, Faculty of Mechanical Engineering and Ship Technology, Institute of Mechanics and Machine Design, Narutowicza 11/12, 80-233 Gdańsk, Poland.

^b Department of Mathematics, Capital University of Science and Technology (CUST), 44000, Pakistan.

*Corresponding author E-mail: Muhammad.bilal.hafeez@pg.edu.pl

Abstract

The goal of this study is to determine the maximum energy and solute particles' transportation growth in a 3D-heated region of Prandtl martial through a dynamic magnetic field. The effects of this field on the properties of solvent molecules and heat conduction are studied. A correctly stated functional method and a finite element approach are comparable to a certain type of differential equations. In order demonstrate the effects of various factors such as mass diffusion, heat generation, and thermal diffusivity on the investigation of the diffusion coefficient and thermal mass in a three-dimensional Newtonian flow, the study of viscous and heat conduction rates is presented. The results show that the comparisons of hybrid nanofluid Fe_2O_3 and Al_2O_3 with base fluid and w.r.t Local skin friction coefficient, Nusselt number and Sherwood number.

Keywords: *Galerkin finite element method, 3-D heated surface, Hybrid nanoparticles, Argumentation into heat energy, Variable magnetic field.*

1. Introduction

The creation of solid nanoparticles is now possible because to technological developments. Many cutting-edge engineering applications utilize these nanoparticles. The field of fluid mechanics has a various fields which use in different scientific approaches. Basically, applications of nanoparticles use for heat absorber many scientists are already studies on the applications of nanoparticles in heat transfer such as [1-7]. Here we study the different types of nanoparticles in heated surface. In this regard, Devi and Devi [8] showed the three-dimensional

(3D) flow behavior of copper and aluminum-oxide hybrid nanoparticles via sheet under the effect of ohmic heating and Lorentz force.

The Carreau Yasuda thermal and mechanical characteristics were taken into consideration while comparing hybrid nanoparticles and nanomaterials in base liquid. Hafeez et al. [9] observed the influence of Williamson liquid on the thermal energy and percentage of nano fluids that were about to melt surfaces. Dogonchi et al. [10] examined the efficacy of fluid heat production in their study of the impact of thermal radiation created by nanoparticles on fluid in the presence parallel surfaces. According to research by Chamkha et al. [11], magnetic fields, spinning barriers, and hybrid nanoparticles all have an impact on the quantity of heat that may be transmitted. By Masayebidarched et al. [12], a theoretical study utilizing hybrid nanoparticles to examine temperature increases in fluid was accomplished. References [13–15] are instances of related articles that investigate how hybrid nanoparticles affect heat generation. Many researchers have studied [16–22] the heat increase of nanofluids by combining various types of nanoparticles with the base liquid. In these investigations, the impacts of genuine variables also on heat rise of nanofluids are investigated, including the joule temperature increase, forces acting, and magnetic influence. It is advised that researchers focus on these most current specialists because they also noticed many mathematical effects, the medium's porosity, and the expanding and contracting of the plates in the no-slip effect. A Casson hybrid nanofluid's thermal properties and the impacts of Dufour and Soret under the impact of the solute's process were investigated in [23]. We saw how nanofluid applications in an automobile radiator improved heat transmission. Analysis of considerable thermodynamic energy production in the partly ionization of hyperbolic tangent material based on ternary hybrid is discovered in [24].

Das et al. [25] investigation of the slip phenomena on MHD boundary layer flow of nanofluid over a vertically stretched sheet addressed non-uniform heat flux effects. Haq et al. [26] investigated at the slip condition over the maxwell fluid flow in the presence of heat transfer. Awais et al. [27] examined the impact of velocity, temperature, and concentration slip on Magnetohydrodynamic nanofluid. Raza et al. study [28] investigated the effects of heat radiation on Casson fluid stagnation point flow under slip circumstances. The entropy production on Peristaltic transport flow for two phases in the existence of slip condition was examined by Ali et al. [29]. Vinita and Poply [30] share their investigation on the slip effects on heat transmission of nanofluid over a stretching cylinder.

The purpose of this investigation is to improve heat transfer by including hybrid nanoparticles into the Prandtl fluid model. Studies in the public domain confirm that no one has undertaken this study to date. This investigation will serve as a starting point for the researchers as they further investigate various elements and analyze a wide range of outcomes. Many energy systems and industries can benefit from this research. A select few major determinants are [31-38]. Due to its extensive uses in industry and many energy systems, energy transfer is a crucial component of the modern period and a hot study field. The base fluid mixture can be blended with the nanoparticles to increase thermal transportation. A number of empirical relationships between substances have been proposed as a result of their properties. When simulating this model in various scenarios with various impacts, researchers pay close attention. Ternary hybrid nanomaterial is used in engineering, cancer treatment, hair care, electrical contacts, ecological tires, dental products, hydrogen fuel, solar energy, optical chemical sensors, bio-sensors, and automotive parts are briefly described in references [39-44].

For analyzing PDEs in two or three spatial variables, the Finite element method (FEM) is a popular simple mathematical methodology described from [45-50]. This technique is widely used in all mathematical demonstrating systems, particularly in the heat and mass transfer systems. It first performed in Ahmad et. al [51] study, which used FEM to simulate NF movement and heat arenas inside a motivated geometry filled by an appliance that produces heat. Hiba et al. [52] used the comprehensive FEM to enhance HNFs. For allied MHD NFs movement, Ali et al. [53] employed a FEM technique to quantify the melting in NFs that are not Newtonian. fluence on HT kinds. Using FEM, Abderrahmane et al. [54] found the best explanation NFs that are not Newtonian. FEM was used by Rana and Gupta [55] to create a result enables HNFs to travel actively and with quadratic convection across a spinning pinecone. By using FEM, Pasha and Domiri-Ganji [56] investigated the effect of HNFs on the widening shallow of Chamfer flippers. By assuming generalized FEM, Redouane et al. [57] investigated the thermal movement flood of hybrid NFs in animated inclusions with switch cylindrical cavities. Alrowaili et al. [58] used FEM to show that NFs convect in a magnetic radioactive single-minded manner. A dynamic system of NFs was described using a homogenization approach and FEM by Zaaroura et al. [59]. Ahmed and Alhazmi [60] used FEM modeling to modify the rotation and different heat conditions of rolls filled with glass spheres when radioactivity was present. Muhammad et al. [61] employed FDM analysis for squeezed flow of HNFs in presence of Cattaneo-Christov

heat flux and convective boundary condition. Li et al. [62] developed multi-scale LBM-FDM analysis on HT.

Numerous industrial applications exist for the Prandtl nanofluid past stretched sheet, such as materials sciences, coating and suspend, metal component cooling, heat transfer technique, and so on. Examples of aerodynamic extrusion of materials include the production of paper, the transfer of high - temperature materials between supply and wind-up rollers, and the cooling of an endless vertical surface in a liquid solution.

As a result, this scientific article is divided into five Sections that present many potential answers. Section 2 presents the formulation of the issue. In Section 3, the numerical approach is briefly explained. Section 4 presents the discussion of the result and Section 5 is based on core points of the article.

2. Mathematical Formulation:

In the present study we investigate the maximum transportation growth in energy and solute particles in Prandtl martial across a vertical 3D-heated surface Under the influence of a dynamic magnetic field, solvent molecules are introduced in the direction of the heated area with the features of heat conduction. The combination of Al_2O_3 and Fe_2O_3 is referred to as a hybrid nanostructure, and Al_2O_3 is referred to as a nanoparticle. Examples of Al_2O_3 and Fe_2O_3 thermal properties are shown in Table 1.

2.1 Research hypothesis for the current model

The following criteria must be applicable to the stream structure, including the requirements:

3-D laminar steady flow,	model of phase flow,	}
Hybrid Prandtl-Eyring nanofluids,	permeable medium,	
MHD,	heat source	
variable thermal conductivity,	viscous dissipation.	

2.2 Flow geometry

The overall system is shown in Fig. 1. The magnetic field was found to be injected along the $y - axis$, with the $x - axis$ presumed to be vertical and the y -axis considered to be horizontal.

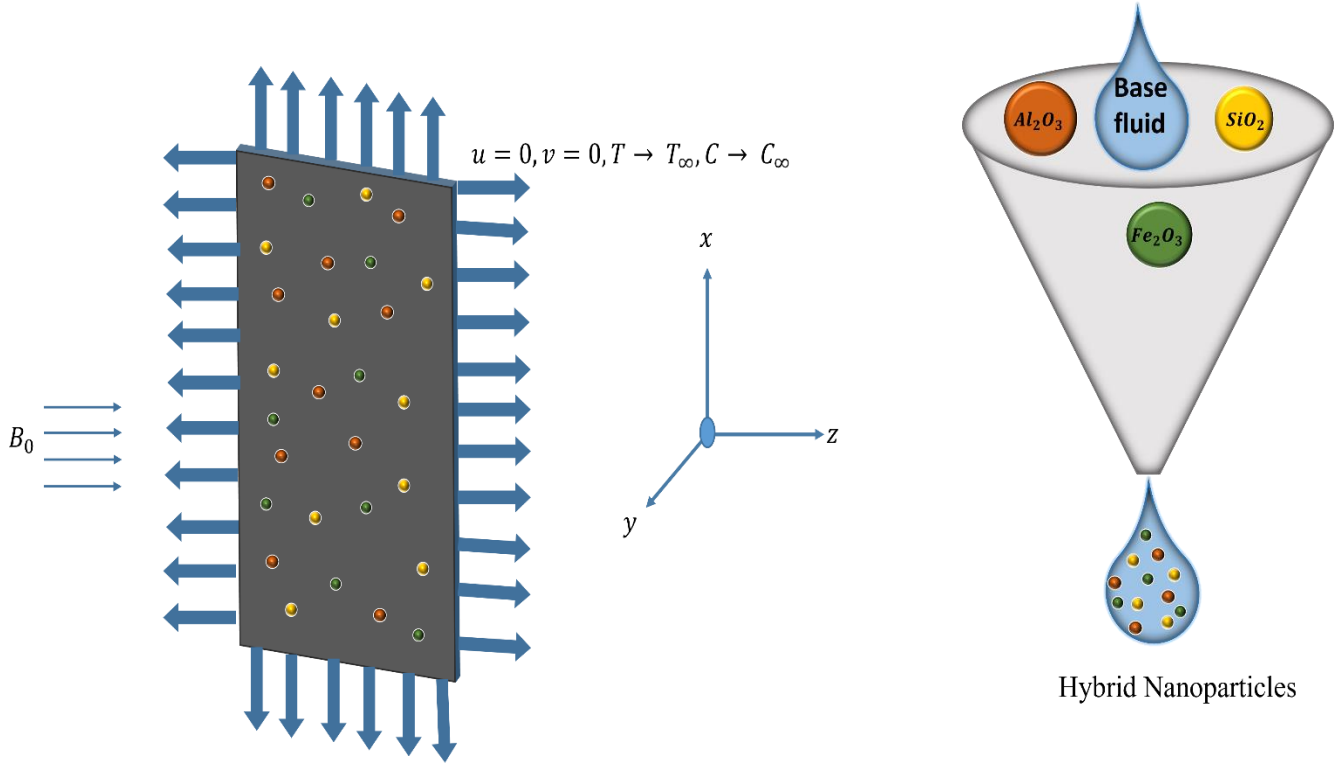


Fig. 1. 3D vertical surface.

2.3 Prandtl-Eyring Fluid Stress Tensor

The following mathematical formula represents the Prandtl-Eyring fluid stress tensor: (see, for example, Mekheimer and Ramadan [63]).

$$\tau = \frac{A_w \sin^{-1} \left[\frac{1}{C_1} \left[(u_y)^2 + (u_y)^2 \right]^{\frac{1}{2}} \right]}{\left[(u_y)^2 + (u_y)^2 \right]^{\frac{1}{2}}} (u_y). \quad (1)$$

The curved velocity in this case reveals the mechanics $\vec{V} = [u(x, y, z), v(x, y, z), w(x, y, z)]$. A_w and C are fluid parameters.

PDEs that describe the problem are as follows:

$$u_x + v_y + w_z = 0, \quad (1)$$

$$uu_x + vv_y = g^*(T - T_\infty) + (\beta_{hnf})_C g^*(C - C_\infty) - \frac{\sigma_{nf} B_0^2}{\rho_{nf}} u - \mu_{hnf} \frac{u}{K_1} + \nu_{nf} u_{zz} - wu_z, \quad (2)$$

$$uv_x + vv_y = v_{hnf}v_{zz} + (\beta_{hnf})_T g^*(T - T_\infty) + (\beta_{hnf})_C g^*(C - C_\infty) - \frac{\sigma_{nf}B_0^2}{\rho_{nf}} v - \mu_{hnf} \frac{v}{K_1} + v_{nf}v_{zz} - wv_z, \quad (3)$$

$$uT_x + vT_y = \frac{1}{(\rho c_p)_{T_{hnf}}} \frac{\partial}{\partial z} (K_{T_{hnf}}(T)T_z) + \frac{Q_0}{(\rho c_p)_{hnf}} (T - T_\infty) + \frac{DK_T}{c_s c_p} \frac{\partial^2 C}{\partial z^2} + \frac{\mu}{(\rho c_p)_f} (u^2 + v^2) - wT_z, \quad (4)$$

$$uC_x + vC_y = \frac{\partial}{\partial z} (D_{hnf}T_z) + \frac{DT}{T_\infty} T_{zz}, -wC_z, \quad (5)$$

System of Eqs. 1-5 BCs are [9];

$$\left. \begin{aligned} u = U_w, v = V_w, w = 0 \\ T = T_w, C = C_w \quad \text{as } y = 0 \\ u = 0, v = 0, T \rightarrow T_\infty, C \rightarrow C_\infty \quad \text{as } y \rightarrow \infty. \end{aligned} \right\} \quad (6)$$

In ethylene glycol, hybrid nanostructures and nanomaterials are related [45]

$$\left. \begin{aligned} \rho_{hnf} &= [(1 - \phi_2)\{(1 - \phi_1)\rho_f + \phi_1\rho_{s1}\}] + \phi_2\rho_{s2}, \rho_{nf} = (1 - \phi)\rho_f + \phi\rho_s \\ (\rho c_p)_{nf} &= (1 - \phi)(\rho c_p)_f + \phi(\rho c_p)_s \\ (\rho c_p)_{hnf} &= [(1 - \phi_2)\{(1 - \phi_1)(\rho c_p)_f + \phi_1(\rho c_p)_{s1}\}] + \phi_1(\rho c_p)_{s2} \end{aligned} \right\} \quad (7)$$

$$\left. \begin{aligned} \frac{k_{nf}}{k_f} &= \left\{ \frac{k_s + (n+1)k_f - (n-1)\phi(k_f - k_s)}{k_s + (n-1)k_f + \phi(k_f - k_s)} \right\}, \mu_{nf} = \frac{\mu_f}{(1-\phi)^{2.5}} \\ \mu_{hnf} &= \frac{\mu_f}{(1-\phi_2)^{2.5}(1-\phi_1)^{2.5}}, \frac{\sigma_{hnf}}{\sigma_f} = \left(1 + \frac{3(\sigma-1)\phi}{(\sigma+2) - (\sigma-1)\phi} \right) \end{aligned} \right\} \quad (8)$$

$$\left. \begin{aligned} \frac{k_{hnf}}{k_{bf}} &= \left\{ \frac{k_{s2} + (n-1)k_{bf} - (n-1)\phi_2(k_{bf} - k_{s2})}{k_{s2} + (n-1)k_{bf} - \phi_2(k_{bf} - k_{s2})} \right\} \\ \frac{\sigma_{hnf}}{\sigma_f} &= \left(\frac{\sigma_{s2} + 2\sigma_f - 2\phi_2(\sigma_{bf} - \sigma_{s2})}{\sigma_{s2} + 2\sigma_f + \phi_2(\sigma_{bf} - \sigma_{s2})} \right) \end{aligned} \right\} \quad (9)$$

The definitions of heat capacity and mass transfer in relation to temperature are

$$K_{hnf}(T) = K_{hnf} \left(1 + \epsilon_1 \frac{T - T_\infty}{T_w - T_\infty} \right), D_{hnf}(T) = K_{hnf} \left(1 + \epsilon_2 \frac{T - T_\infty}{T_w - T_\infty} \right). \quad (10)$$

Similarity transformation is,

$$\left. \begin{aligned} u = a(x+y)^{\frac{1}{3}}, v = a(x+y)^{\frac{1}{3}}, \eta = \sqrt{\frac{a}{\nu_f}}(x+y)^{-\frac{1}{3}}z, \\ w = -\sqrt{a\nu_f}(x+y)^{-\frac{1}{3}} \left(\frac{2}{3}(f+g) - \frac{1}{3}\eta(F+G) \right), \theta = \frac{T - T_\infty}{T_w - T_\infty}, \phi = \frac{C - C_\infty}{C_w - C_\infty} \end{aligned} \right\} \quad (11)$$

In Eqs. (1) – (6), similarity transformation utilized, we have

$$\left. \begin{aligned} \frac{\nu_{hnf}}{\nu_f} (\alpha_1 F'''' + \alpha_2 F''^2 F''') + \frac{2}{3} (F + G) F'' - 2F'(F' + G') + 4\lambda G' + (Gr)_t \theta \\ + (Gr)_c \phi - \left(\frac{\sigma_{hnf}}{\sigma_f} \right) \left(\frac{\rho_f}{\rho_{hnf}} \right) M f' - \left(\frac{\mu_{hnf}}{\mu_f} \right) K^* f' = 0 \\ f'(0) = 1, f(0) = 0, f'(\infty) \rightarrow 0. \end{aligned} \right\} \quad (12)$$

$$\left. \begin{aligned} \frac{\nu_{hnf}}{\nu_f} (\alpha_1 G'''' + \alpha_2 G''^2 G''') + \frac{2}{3} (F + G) G'' - 2G'(F' + G') + 4\lambda G' + (Gr)_t \theta \\ + (Gr)_c \phi - \left(\frac{\sigma_{hnf}}{\sigma_f} \right) \left(\frac{\rho_f}{\rho_{hnf}} \right) M g' - \left(\frac{\mu_{hnf}}{\mu_f} \right) K^* g' = 0 \\ g'(0) = \beta, g(0) = 0, g'(\infty) \rightarrow 0. \end{aligned} \right\} \quad (13)$$

$$\left. \begin{aligned} \frac{K_{hnf}}{K_f} [(1 + \epsilon_1 \theta) \theta'' + \epsilon_1 (\theta')^2] + \left(\frac{(\rho c_p)_{hnf}}{(\rho c_p)_f} \right) \frac{2}{3} Pr (F + G) \theta' - \left(\frac{(\rho c_p)_{hnf}}{(\rho c_p)_f} \right) \frac{2}{3} Pr (F' + G') \theta \\ - Pr \beta^* \theta + \left(\frac{(\rho c_p)_{hnf}}{(\rho c_p)_f} \right) Du Pr \phi'' + \left(\frac{\sigma_{hnf}}{\sigma_f} \right) M Pr Ec (F' + G')^2 = 0 \\ \theta(0) = 1, \theta(\infty) \rightarrow 0 \end{aligned} \right\} \quad (14)$$

$$\left. \begin{aligned} \frac{D_{hnf}}{D_f} [(1 + \epsilon_1 \varphi) \varphi'' + \epsilon_2 \varphi' \theta'] + \frac{2}{3} Sc (F + G) \phi' - \frac{2}{3} Sc (F' + G') \phi + Sr Sc \theta'' = 0 \\ \phi(0) = 1, \phi(\infty) \rightarrow 0. \end{aligned} \right\} \quad (15)$$

Dimensionless numbers are:

$$\left. \begin{aligned} (Gr)_t = \frac{(\beta_{hnf})_T g^* c T_0}{a^2}, (Gr)_c = \frac{(\beta_{hnf})_C g^* d C_0}{a^2}, M = \frac{\sigma_f B_0^2 A^2}{\rho_f a}, K^* = \frac{\mu_f}{a k_1}, \\ Ec = \frac{1}{(c_p)_f} \frac{a^2}{c T_0}, \beta^* = \frac{Q_0}{a(\rho c_p)_f}, Du = \frac{DK_T d C_0}{C_s C_p V_f c T_0}, Sc = \frac{V_f}{d_f}, Sr = \frac{D_T T_0}{(T_\infty C_0) V_f}. \end{aligned} \right\} \quad (16)$$

Table 1 explains the group of variables that were employed in this inquiry to achieve its practical goals.

Table 1. Thermal components of SiO_2 , Al_2O_3 and Fe_2O_2 .

Fe_2O_3	Al_2O_3	SiO_2
$\rho = 999$	$\rho = 6490$	$\rho = 2213.5$
$C_p = 766$	$C_p = 679$	$C_p = 1989$
$k = 0.155$	$k = 33.01$	$k = 1.5034$
$\beta = 2.8424 \times 10^{-5}$	$\beta = 6.09 \times 10^{-5}$	$\beta = 5.8 \times 10^{-4}$
$\sigma = 0.149 \times 10^{-11}$	$\sigma = 6.30 \times 10^7$	$\sigma = 5.4 \times 10^6$

In terms of surface-based forces,

$$C_{fx} = \frac{u_z|_{z=0}}{\rho_f (U_w)^2} = \frac{(1-\phi_1)^{-2.5}}{(1-\phi_2)^{2.5} (Re)^{1.5}} [\alpha_1 f''(0) + \alpha_2 (f'''(0))^3], \quad (17)$$

$$C_{gy} = \frac{\frac{\partial v}{\partial z}|_{z=0}}{\rho_f(U_w)^2} = \frac{(1-\phi_1)^{-2.5}}{(1-\phi_2)^{-2.5}(Re)^{1.5}} [\alpha_1 g''(0) + \alpha_2 (g'''(0))^3]. \quad (18)$$

Nusselt number is

$$Nu = -\frac{(x+y)K_{hnf}T_z|_{y=0}}{k_f(T-T_\infty)} = -\frac{K_{hnf}}{k_f(Re)^{1.5}}\theta'(0),$$

Mass diffusion is

$$Sh = \frac{(x+y)D_{hnf}c_z|_{y=0}}{D_f(C-C_\infty)} = -\frac{D_{hnf}}{D_f(Re)^{1.5}}\phi'(0). \quad (19)$$

where $Re = \frac{xU_w}{\nu_f}$, the Reynolds number.

3. Numerical Procedure:

The Galerkin finite element method is used to resolve the given issue. Here [27-31] is a collection of the FEMs that describe the approach. The FEM capacity to manage solution domains with arbitrary geometry is its most major practical benefit. The fact that the governing differential equations are converted into a set of algebraic equations in a theoretically correct manner without the use of heuristics or numerical approximations is another significant benefit. The finite element method is additionally supported by a solid theoretical framework. It may be demonstrated that the finite element approach and a correctly stated functional minimization method are equivalent for a particular class of differential equations. The list below includes several finite element method restrictions.

1. Compared to other numerical methods, analysis of finite elements is thought to be more difficult to comprehend;
2. Comparing the computational cost of the finite element approach to other methods, it can be expensive;
3. Large amounts of data are required for mesh-free analysis.
4. The residual equations have been constructed.
5. When the discretization integrals are produced by the Galerkin technique, stiffness matrices are produced.

- The nonlinear system's equations are converted to linear ones by following to the limits of element assembly. The linearized system is solved 10^{-3} under the calculation.

The FEM's flowchart is described in Fig. 2.

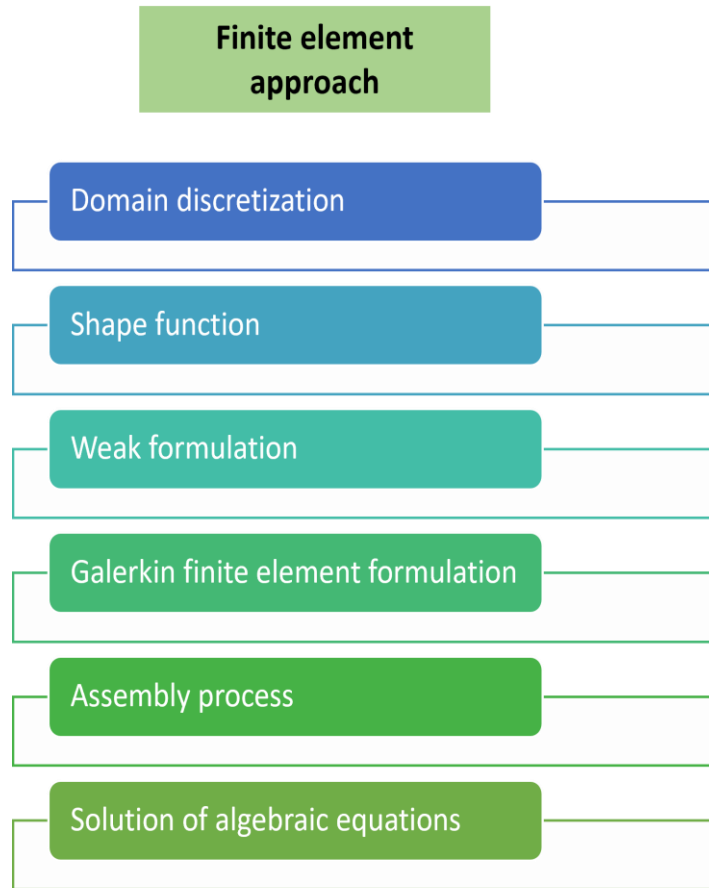


Fig. 2. Flow chart of finite element method.

As soon as the confluence has been confirmed, results that are grid independent are obtained. It makes use of the error analysis criterion. In order to illustrate the effects of heat flux, diffusion, porous media, and Examples of parametric study are presented for the rate of viscous dissipation and Heat conduction on investigation of thermal mass and momentum transfer in three-dimensional Newtonian fluid flow. The investigation of 300 pieces without mesh is shown in Table 3 along with the results.

Table 3 displays a study of temperatures, velocities, and concentrations assuming 300 grid elements.

e	$F' \left(\frac{\eta_{max}}{2} \right)$	$G' \left(\frac{\eta_{max}}{2} \right)$	$\theta \left(\frac{\eta_{max}}{2} \right)$	$\phi \left(\frac{\eta_{max}}{2} \right)$
30	0.7840956617	0.003662478537	0.0036624785	0.00010687187
60	0.8208393123	0.09000953164	0.1110267939	0.00506883934
90	0.8299235799	0.002650512986	0.01342155803	0.00005691660
120	0.6909729670	0.0004285360556	0.01039153713	0.04544824477
150	0.6949838844	0.0004160495348	0.01033124362	0.04500018680
180	0.6979030185	0.0004100790678	0.01029442761	0.04477827150
210	0.7002801242	0.0004086029651	0.01027192133	0.04470747392
240	0.7023798401	0.0004105345687	0.01025902553	0.04474784442
270	0.7043301851	0.0004151139823	0.01025290562	0.04487205678
300	0.7061806472	0.0004216405675	0.01025152760	0.04505585937

Table 4. Studying the temperature gradient in comparison to data reported by Qureshi et al. [64] for nanofluid

Qureshi et.al [64]	Present results
Nusselt number	Nusselt number
0.62	0.6768954
0.72141	0.7233317
0.82458	0.8247624

3. Results and discussion

An Analytical investigation has been given to look at the physics of the problem mentioned in the previous section. Finite element method is already used in many heat transfer problems to generate a numerical solution [65-68]. analysis of the temperature gradient in comparison to published Solving such issues requires the application of the mathematical model FEM for thermal energy and mass flow of non-Newtonian flows over a material with thermal and boundary concentrations variations. Since the quality that keeps flow from deforming until a particular scientific stress is reached, applied stress. analysis of the temperature gradient in comparison to published for the fluid to endure the produced strain and attain equilibrium, the maximum stress must increase. temperature gradient comparison with reported The The velocity profile as a result (in both the x , y and z components) is seen to decrease. Fig.3 to Fig. 5 shows the velocity profile with different parameters with different values. Contrary to increased

influences of fluid parameter, fluid is shown to become thin. Diverse samples of variable of values are used in various numerical investigations. The parameter k^* is also shown in Figs. 3 and 8 which shows the effect of porous parameter with different impacts. The Lorentz force and the magnetic field are intimately linked. The change of M can be used to assess how the Lorentz force affects flow. With rising values of M and porous medium, the Lorentz force's negative effects become more pronounced. As seen in Figs. 7 and 8, the Lorentz force causes the flow to slow down as a result. To reduce the thickness of the boundary layer, a change in the magnetic field is used. It is also claimed that the Lorentz force for the flow of $Fe_2O_3 - Al_2O_3$ nanofluid is larger than the Lorentz force for the flow of Fe_2O_3 nanofluid. The interactions between M, Ec, Pr, Du and Gr by thermal energy is investigated for alumina-ferrofluids hybrid nanofluid. From Figs. 9–13 show how various parameters have been observed to have an impact. A reference to the input variable Du is the Dufour number. When the heat energy transcript then it shows up in the heat equation's dimensionless form. It examines how the variations brought on by dispersed soluble chemicals and nanoparticles cause changes in the fluid's thermal heat transfer. The temperature of Fe_2O_3 -nanofluid and $Fe_2O_3 - Al_2O_3$ -hybrid nanofluid is affected by Du , as shown in Fig. 9. The temperature of both kinds of fluids tends to increase as a function of Du . Both types of fluids' temperatures tend to increase as a function of Du . Fe_2O_3 -temperature hybrid nanofluids is more sensitive to Du than $Fe_2O_3 - Al_2O_3$ -temperature nanofluid's. The impact of liquid particles on a fluid temperature copper nanofluid and $Fe_2O_3 - Al_2O_3$ -nanofluid are shown in Fig. 10. As a result, Fig. 11 shows the temperature profile with impact of magnetic field. In this fig it clearly shows that when we increasing the values of Magnetic field the temperature profile will be increasing. We can also observer that the comparison of hybrid nano fluids and simple nanofluids. The parameter ϵ_1 and Ec also shows the results from temperature profile. When we increase the value the parameter ϵ_1 and Ec the temperature is also increasing. This observation is supported by the data in Fig. 12 and Fig.13. Additionally, Fluid velocity significantly raises the temperature of the fluids ($Fe_2O_3 - Al_2O_3$ -nanofluid) in these figs. The parameters $Sr, (Gr)_c$, and Sc , respectively, Analyze the effects of temperature gradient, buoyancy force caused by concentration differences, and diffusion coefficient on the concentration field. Fig. 14 and Fig. 15 show how their impact on concentrations profile with Sr and Sc . It shows that when Sc and Sr increases, the concentration field shrinks. For both the $Fe_2O_3 - Al_2O_3$ -fluid the wall stress data in numbers in the x and y

directions, wall rate of heat transfer, and wall mass flux are examined in Table 4. A summary of the numerical findings is shown in Table 5. The number of vacancies in the porous material seem to have a negative correlation with the k^* . Thus, the stress per unit area rises as a result. As a result, wall shear strains in both the x and y axes are rising functions of k^* . The difference in temperature and the mass-flux are both descending functions of k^* . In addition, it has been discovered that raising Du raises wall shear stress. The wall mass transfer coefficient against Du , however, is seen to increase. Sr is the factor that ultimately determines how hot or cold solute particles are, and an increase in Sr causes the wall shear stress to decrease. Sc clearly exhibits the opposite tendency.

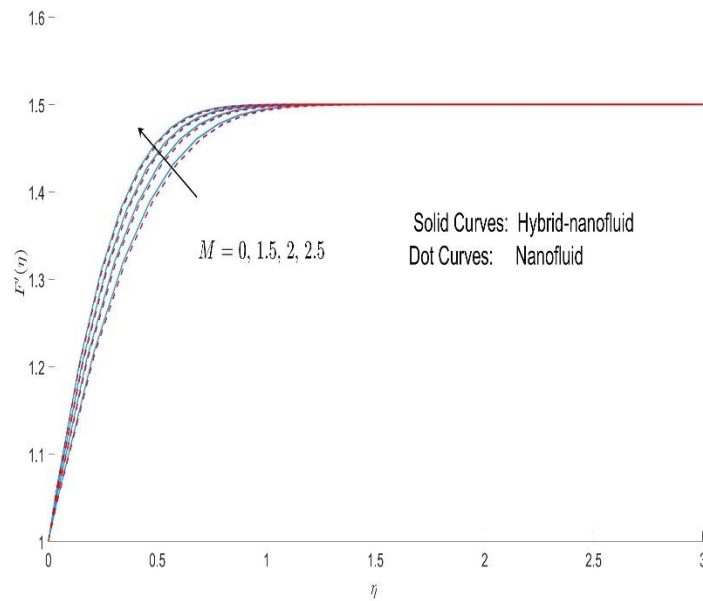


Fig. 3. Influence of M on F'

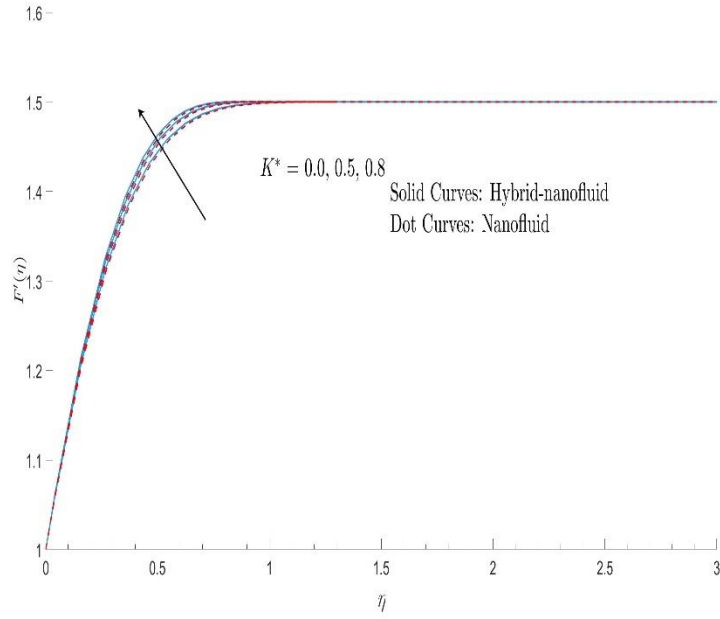


Fig. 4. Influence of K^* on F' .

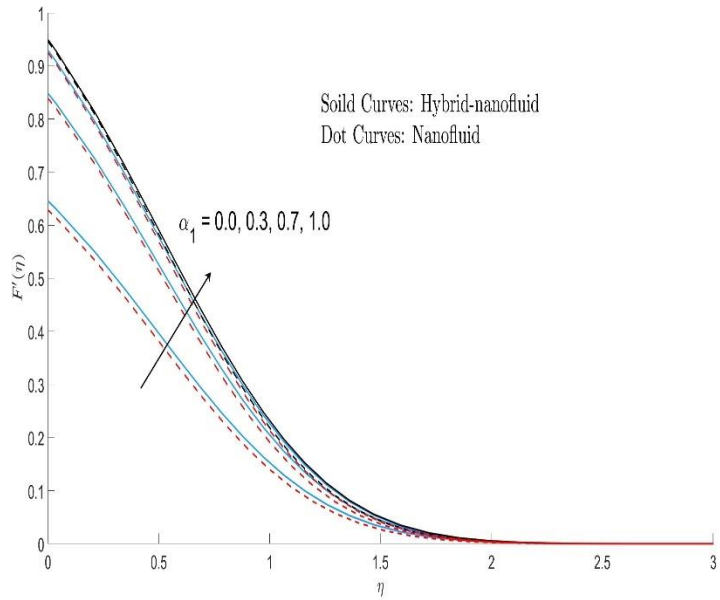


Fig. 5. Influence of α_1 on F' .

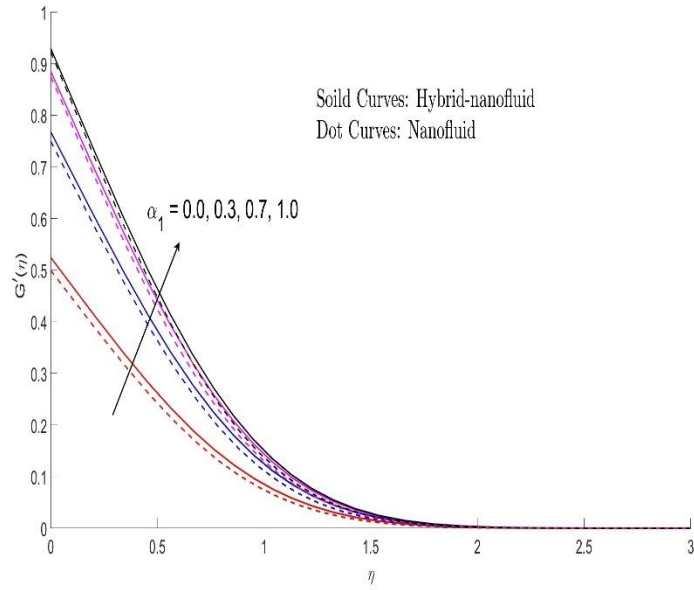


Fig. 6. Influence of α_1 on G' .

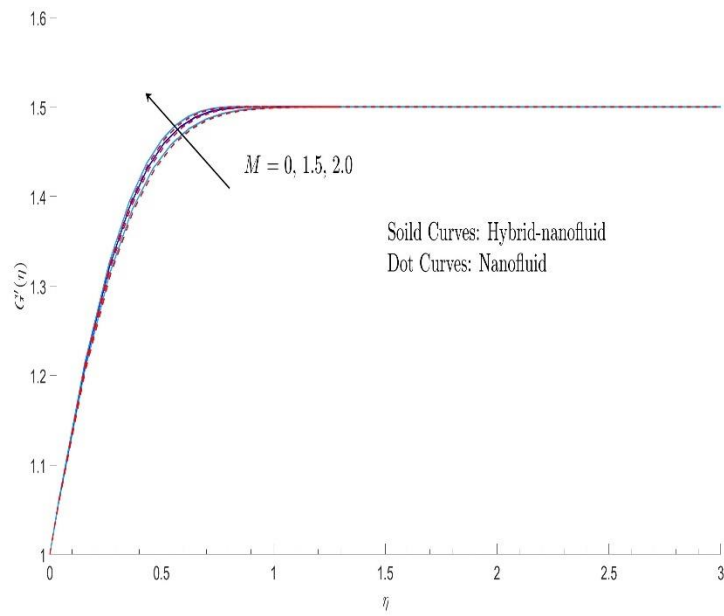


Fig. 7. Influence of M on G' .

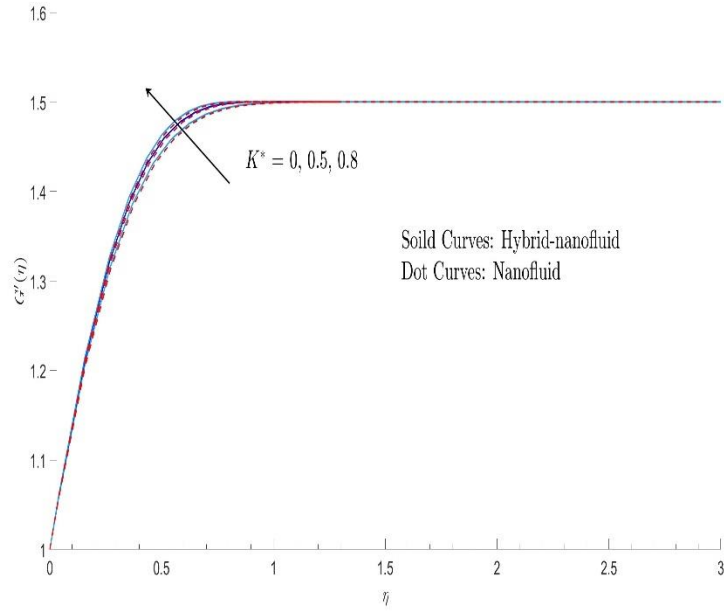


Fig. 8. Influence of K^* on G' .

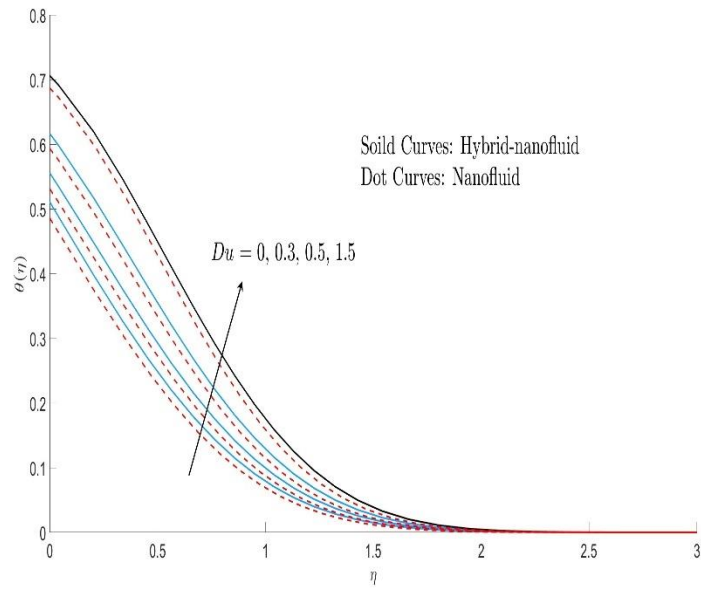


Fig. 9. Influence of Du on θ .

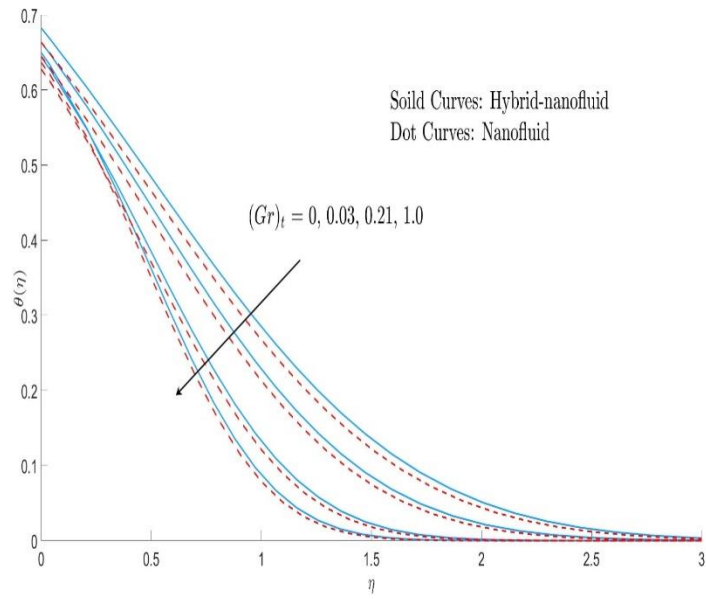


Fig. 10. Influence of $(Gr)_t$ on θ .

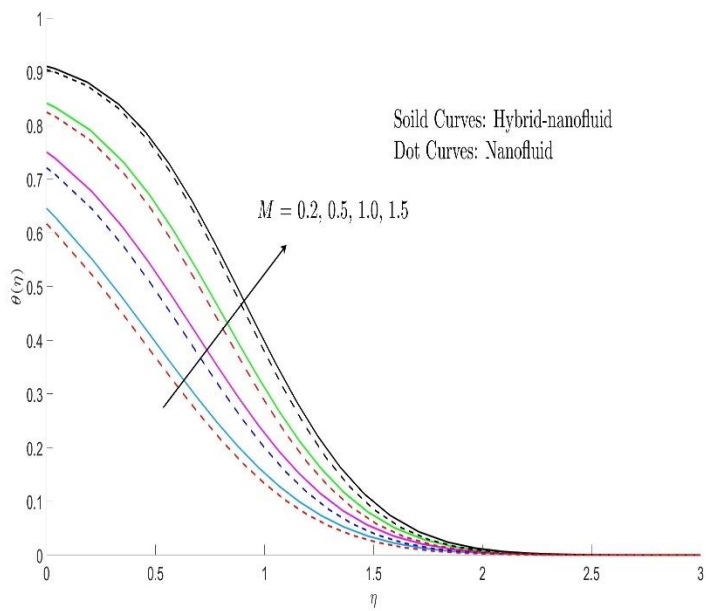


Fig. 11. Influence of M on θ .



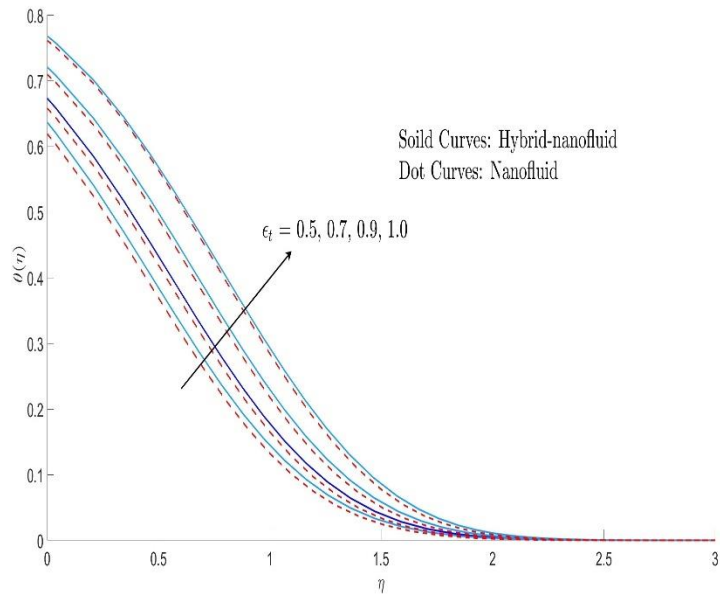


Fig. 12. Influence ϵ_1 on θ .

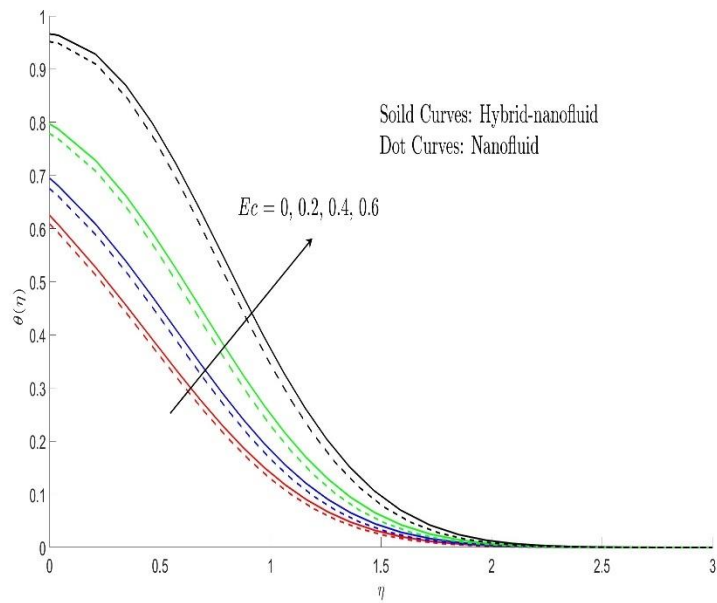


Fig. 13. Influence of Ec on θ .

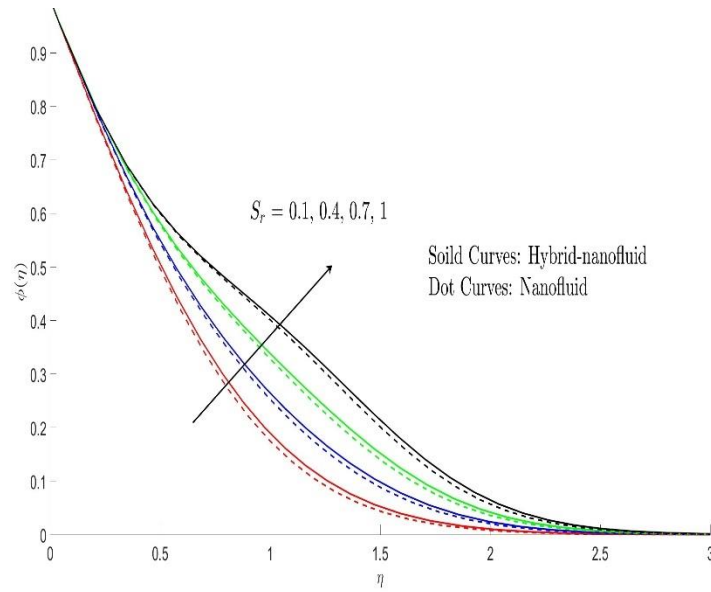


Fig. 14. Influence of Sr on ϕ .

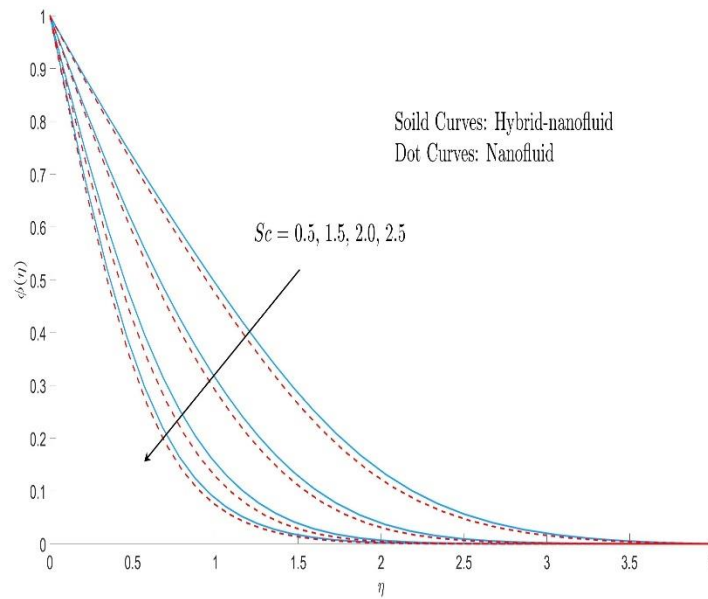


Fig. 15. Influence of Sc on ϕ .

Table 5. physical quantizations in simulation when $Du = 0.3, M = 0.6, Sr = 0.2, \beta = 0.1, Pr = 0.7, (Gr)_c = 1.6, K^* = 0.9, \beta^* = 2.9, Ec = 6, Sc = 10,$ and $(Gr)_t = 0.1$.

		$-C_{fx}(Re)^{1.5}$	$-C_{fy}(Re)^{1.5}$	$-Nu(Re)^{1.5}$	$-Sh(Re)^{1.5}$
k^*	0.1	0.5854736654	0.4251622865	1.469615409	1.336014008
	0.3	0.5908495342	0.5872447698	1.477060316	1.342782105
	0.5	0.6643955706	0.594703677	1.480258693	1.376598812
Du	0.1	0.5264339688	1.137228409	1.457396180	1.324905619
	0.3	0.5042650248	1.119093231	1.424234505	1.310213186
	0.5	0.5000114186	1.010257923	1.417014987	1.302740897
Sr	0.1	0.5000114159	1.210257919	1.778926707	1.617206098
	0.3	0.4856589213	1.138660768	1.726486241	1.604078401
	0.5	0.4835117384	1.108346245	1.718368259	1.525789326
Sc	0.1	0.4835117388	1.238346247	2.235444588	2.032222353
	0.3	0.4835117399	1.238346247	2.563934111	2.330849192
	0.5	0.4835117384	1.238346245	2.805765261	2.550695691

Table 6. Shows that the comparisons of hybrid nano fluids ($Fe_2O_3 - Al_2O_3$) and nanofluid (Fe_2O_3) w.r.t Local skin friction coefficient, Nusselt number and Sherwood number.

		Hybrid Nanofluid ($Fe_2O_3 - Al_2O_3$)			Nanofluid (Fe_2O_3)		
		$Re^{\frac{1}{2}}C_f$	$Re^{-\frac{1}{2}}Nu$	$Re^{-\frac{1}{2}}Sh$	$Re^{\frac{1}{2}}C_f$	$Re^{-\frac{1}{2}}Nu$	$Re^{-\frac{1}{2}}Sh$
E_i	0.2	0.797275	0.584809	0.471631	0.366215	0.515542	0.392980
	0.3	0.781452	0.582914	0.553971	0.361498	0.513625	0.437901
	0.4	0.775078	0.582143	0.587303	0.358824	0.512534	0.463449
	0.6	0.813044	0.696015	0.702877	0.359494	0.612130	0.591962
B_i	0.4	0.831321	0.565637	0.360010	0.747694	0.623337	0.346218
	0.5	0.829379	0.782424	0.382862	0.737070	0.645848	0.344631
	0.6	0.810632	0.602874	0.357482	0.729593	0.661806	0.343501
	0.8	0.799329	0.623448	0.356074	0.746463	0.832262	0.372349
$(Gr)_t$	0.0	1.097611	0.564346	0.350003	0.995086	0.618957	0.336153
	0.1	0.954371	0.576780	0.354613	0.862183	0.633571	0.340746
	0.2	0.819197	0.587380	0.358536	0.737070	0.645848	0.344631
	0.3	0.690322	0.596671	0.361961	0.617928	0.656470	0.348014

5. Conclusions

We look at the characteristics of thermal energy and mass transfer that have a big impact on how hybrid nanoparticles and nanoparticles behave along the vertical 3D plate. Principal conclusions include the following:

- In comparison to nanofluid, the use of hybrid nanoparticles is thought to be more effective at maximizing energy production into fluidic particles;
- The parameter of the magnetic field reduces particle velocity;
- The development of heat energy is influenced by variable thermal conductivity numbers.
- The non-approach Fourier's has less of an impact on thermal diffusion and heat amplification when compared to larger values of the heat source number.
- Lorentz force diminishes distribution into fluid flow motion; however, an investigation found the reverse trend instead.

Future physical and technological difficulties could be addressed by the FEM [69-79]. The papers [80-90] go over a few recent developments that aim at the value of the study domain in consideration.

Compliance with Ethical Standards

The authors have not declared any conflicts of interest.

Data availability

This published publication contains all of the data created or analyzed during this investigation.

Author Contributions

MBH presented the idea and topic. MBH solved the problem and present the results. MBH, MK validated the results via literature. MBH, MK and WJ review and supervision. Each author participated equally to the drafting and editing of the paper. The paper was examined by each author.

Nomenclature:

Du	Dufour number	Nu	Nusselt number
T	Nanofluid temperature	PDEs	partial differential equations
T_∞	prevailing temperature	Al_2O_3	alumina
g^*	force of gravity	Fe_2O_3	ferrofluids

u, v	velocity component in x, y direction ($m s^{-1}$)	Sh	rate of mass diffusion
k	thermal efficiency ($W m^{-1} K^{-1}$)		
Ec	Eckert number	q_w	flow of wall heat
h_{nf}	hybrid nanoparticles		
x, y, z	dimensional space coordinates (m)	Greek symbols	
Sr	Soret number	ρ	Density
Sc	Schmidt number	β^*	energy source
K^*	permeable medium element	ρc_p	capacity for heat
C_{fx}	Surface tension	ϕ	volume fractions
Re	Reynolds number	σ	conductive to electricity (Ωm) ⁻¹
M	magnetic factor	D_{hnf}	Diffusivity of the hybrid nanofluid's temperature
β_{hnf}	thermal expansion factor for volume		

References

- [1] Sidik, NA.; Adamu, IM.; Jamil MM.; Kefayati, GH.; Mamat, R.; Najafi G. Recent progress on hybrid nanofluids in heat transfer applications: a comprehensive review. *International Communications in Heat and Mass Transfer*. 2016 Nov 1;78:68-79.
- [2] Bi, SS.; Shi, L.; Zhang, LL. Application of nanoparticles in domestic refrigerators. *Applied Thermal Engineering*. 2008 Oct 1;28(14-15):1834-43.
- [3] Xuan, Y.; Li, Q. Heat transfer enhancement of nanofluids. *International Journal of heat and fluid flow*. 2000 Feb 1;21(1):58-64.
- [4] Wen, D.; Lin, G.; Vafaei, S.; Zhang, K. Review of nanofluids for heat transfer applications. *Particuology*. 2009 Apr 1;7(2):141-50.
- [5] Khan, I.; Hussanan, A.; Saqib, M.; Shafie, S. Convective heat transfer in drilling nanofluid with clay nanoparticles: applications in water cleaning process. *BioNanoScience*. 2019 Jun;9(2):453-60.

- [6] Chopkar, M.; Das, PK.; Manna, I. Synthesis and characterization of nanofluid for advanced heat transfer applications. *Scripta Materialia*. 2006 Sep 1;55(6):549-52.
- [7] Santos, CS.; Gabriel, B.; Blanchy, M.; Menes, O.; García, D.; Blanco, M.; Arconada, N.; Neto, V. Industrial applications of nanoparticles—a prospective overview. *Materials Today: Proceedings*. 2015 Jan 1;2(1):456-65.
- [8] Devi SS, Devi SA. Numerical investigation of three-dimensional hybrid Cu–Al₂O₃/water nanofluid flow over a stretching sheet with effecting Lorentz force subject to Newtonian heating. *Canadian Journal of Physics*. 2016;94(5):490-6.
- [9] Hafeez, Muhammad Bilal, Marek Krawczuk, Hasan Shahzad, Amjad Ali Pasha, and Mohammad Adil. "Simulation of hybridized nanofluids flowing and heat transfer enhancement via 3-D vertical heated plate using finite element technique." *Scientific reports* 12, no. 1 (2022): 1-15.
- [10] A. S. Dogonchi, K. Divsalar, and D. D. Ganji. "Flow and heat transfer of MHD nanofluid between parallel plates in the presence of thermal radiation." *Computer Methods in Applied Mechanics and Engineering* 310 (2016): 58-76.
- [11] A. J. Chamkha, A. S. Dogonchi, and D. D. Ganji. "Magneto-hydrodynamic flow and heat transfer of a hybrid nanofluid in a rotating system among two surfaces in the presence of thermal radiation and Joule heating." *AIP Advances* 9, no. 2 (2019): 025103.
- [12] S. Mosayebidorcheh, M. Sheikholeslami, M. Hatami, and D. D. Ganji. "Analysis of turbulent MHD Couette nanofluid flow and heat transfer using hybrid DTM–FDM." *Particuology* 26 (2016): 95-101.
- [13] M. Sheikholeslami, H. R. Kataria, and A. S. Mittal. "Effect of thermal diffusion and heat-generation on MHD nanofluid flow past an oscillating vertical plate through porous medium." *Journal of Molecular Liquids* 257 (2018): 12-25.
- [14] U. Nazir, M. Nawaz, M.M Alqarni and S. Saleem. "Finite element study of flow of partially ionised fluid containing nanoparticles". *Arabian Journal for Science and Engineering* (2021): 10257-1026.

- [15] S. R. Sajjad, T. Muhammad, H. Sadia, and R. Ellahi. "Hydromagnetic flow of Jeffrey nanofluid due to a curved stretching surface." *Physica A: Statistical Mechanics and its Applications* 551 (2020): 124060.
- [16] U. Khan, A. Zaib and F. Mebarek-Oudina, "Mixed convective magneto flow of SiO₂–MoS₂/C₂H₆O₂ hybrid nanoliquids through a vertical stretching/shrinking wedge: stability analysis." *Arabian Journal for Science and Engineering*, 45 (2020): 9061-9073.
- [17] K. Swain, F. Mebarek-Oudina, and M. S. Abo-Dahab. "Influence of MWCNT/Fe₃O₄ hybrid nanoparticles on an exponentially porous shrinking sheet with chemical reaction and slip boundary conditions." *Journal of Thermal Analysis and Calorimetry*, (2021): 1-10.
- [18] Mebarek-Oudina, "Convective heat transfer of Titania nanofluids of different base fluids in a cylindrical annulus with a discrete heat source." *Heat Transfer—Asian Research*, 48(1) (2019): 135-147.
- [19] S. Marzougui, M. Bouabid, F. Mebarek-Oudina, N. Abu-Hamdeh, M. Magherbi, and K. Ramesh. "A computational analysis of heat transport irreversibility phenomenon in a magnetized porous channel." *International Journal of Numerical Methods for Heat & Fluid Flow* (2020).
- [20] A. Zaim, A. Aissa, F. Mebarek-Oudina, F. B. Mahanthesh, G. Lorenzini, M. Sahnoun, and M. El Ganaoui. "Galerkin finite element analysis of magneto-hydrodynamic natural convection of Cu-water nano liquid in a baffled U-shaped enclosure." *Propulsion and Power Research*, 9(4) (2020): 383-393.
- [21] M. S. Abo-Dahab, A.M. Abdelhafez, F. Mebarek-Oudina, and M. S. Bilal. "MHD Casson nanofluid flow over nonlinearly heated porous medium in presence of extending surface effect with suction/injection." *Indian Journal of Physics*, (2021): 1-15.
- [22] R. Fares, F. Mebarek-Oudina, A. Aissa, M. S. Bilal, and F. H. Öztop. "Optimal entropy generation in Darcy-Forchheimer magnetized flow in a square enclosure filled with silver-based water nano liquid." *Journal of Thermal Analysis and Calorimetry*, 1-11: (2021).
- [23] M.B. Hafeez, W. Sumelka, U. Nazir, H. Ahmad, and S. Aska. "Mechanism of Solute and Thermal Characteristics in a Casson Hybrid Nanofluid Based with Ethylene Glycol Influenced by Soret and Dufour Effects". *Energies*, 14(20) (2021): 6818.

- [24] M. Hafeez, R. Amin, K. Nisar, W. Jamshed, H. A. Abdel-Aty, and M. Khashan. "Heat transfer enhancement through nanofluids with applications in an automobile radiator." *Case Studies in Thermal Engineering*, 27 (2021), 101192.
- [25] Das, S., R. N. Jana, and O. D. Makinde. "MHD boundary layer slip flow and heat transfer of nanofluid past a vertical stretching sheet with non-uniform heat generation/absorption." *International Journal of Nanoscience* 13, no. 03 (2014): 1450019.
- [26] Haq, Rizwan Ul, Sohail Nadeem, Zafar Hayat Khan, and Noreen Sher Akbar. "Thermal radiation and slip effects on MHD stagnation point flow of nanofluid over a stretching sheet." *Physica E: Low-dimensional systems and nanostructures* 65 (2015): 17-23.
- [27] Awais, M., T. Hayat, Aamir Ali, and S. Irum. "Velocity, thermal and concentration slip effects on a magneto-hydrodynamic nanofluid flow." *Alexandria Engineering Journal* 55, no. 3 (2016): 2107-2114.
- [28] Raza, Jawad. "Thermal radiation and slip effects on magnetohydrodynamic (MHD) stagnation point flow of Casson fluid over a convective stretching sheet." *Propulsion and power research* 8, no. 2 (2019): 138-146.
- [29] Ali, Aamir, Zahir Shah, S. Mumraiz, Poom Kumam, and M. Awais. "Entropy generation on MHD peristaltic flow of Cu-water nanofluid with slip conditions." *Heat Transfer—Asian Research* 48, no. 8 (2019): 4301-4319.
- [30] Vinita, V., and Vikas Poply. "Impact of outer velocity MHD slip flow and heat transfer of nanofluid past a stretching cylinder." *Materials Today: Proceedings* 26 (2020): 3429-3435.
- [31] T. Hayat, and M. Nawaz. "Soret and Dufour effects on the mixed convection flow of a second-grade fluid subject to Hall and ion-slip currents." *International Journal for Numerical Methods in Fluids* 67, no. 9 (2011): 1073-1099.
- [32] M. Nawaz, T. Hayat, and A. Alsaedi. "Dufour and Soret effects on MHD flow of viscous fluid between radially stretching sheets in porous medium." *Applied Mathematics and Mechanics* 33, no. 11 (2012): 1403-1418.
- [33] M. Subrata, S. Shaw, and G. C. Shit. "Fractional order model for thermochemical flow of blood with Dufour and Soret effects under magnetic and vibration environment." *Colloids and Surfaces B: Biointerfaces* 197 (2021): 111395.
- [34] W. Iskandar, A. Ishak, and I. Pop. "Dufour and Soret effects on Al₂O₃-water nanofluid flow over a moving thin needle: Tiwari and Das model." *International Journal of Numerical Methods for Heat & Fluid Flow* (2020).
- [35] K. Ambreen A. S. Naeem, R. Ellahi, Sadiq M. Sait, and K. Vafai. "Dufour and Soret effects on Darcy-Forchheimer flow of second-grade fluid with the variable

magnetic field and thermal conductivity." *International Journal of Numerical Methods for Heat & Fluid Flow* (2020).

- [36] Bilal, S., M. Imtiaz Shah, Noor Zeb Khan, Ali Akgül, and Kottakkaran Sooppy Nisar. "Onset about non-isothermal flow of Williamson liquid over exponential surface by computing numerical simulation in perspective of Cattaneo Christov heat flux theory." *Alexandria Engineering Journal* 61, no. 8 (2022): 6139-6150.
- [37] Bilal, S., Imtiaz Ali Shah, Ali Akgül, Kottakkaran Sooppy Nisar, Ilyas Khan, M. Motawi Khashan, and I. S. Yahia. "Finite difference simulations for magnetically effected swirling flow of Newtonian liquid induced by porous disk with inclusion of thermophoretic particles diffusion." *Alexandria Engineering Journal* 61, no. 6 (2022): 4341-4358.
- [38] Khan, Umair, Sardar Bilal, A. Zaib, O. D. Makinde, and Abderrahim Wakif. "Numerical simulation of a nonlinear coupled differential system describing a convective flow of Casson gold–blood nanofluid through a stretched rotating rigid disk in the presence of Lorentz forces and nonlinear thermal radiation." *Numerical Methods for Partial Differential Equations* 38, no. 3 (2022): 308-328.
- [39] Kousar, N., Taher A. Nofal, W. Tahir, S. M. Bilal, and Ndolane Sene. "Impact of Ferromagnetic Nanoparticles Submerged in Chemically Reactive Viscoelastic Fluid Transport Influenced by Double Magnetic Dipole." *Journal of Nanomaterials* 2022 (2022).
- [40] Tahir, W., Nesreen Althobaiti, N. Kousar, Sharifah E. Alhazmi, S. Bilal, and A. Riaz. "Effects of homogeneous-heterogeneous reactions on Maxwell ferrofluid in the presence of magnetic dipole along a stretching surface: A Numerical Approach." *Mathematical Problems in Engineering* 2022 (2022).
- [41] Bilal, Sardar, and Imtiaz Ali Shah. "A comprehensive physical insight about thermo physical aspects of Carreau fluid flow over a rotated disk of variable thickness by implementing finite difference approach." *Propulsion and Power Research* 11, no. 1 (2022): 143-153.
- [42] Bilal, S., Imtiaz Ali Shah, Muhammad Ramzan, Kottakkaran Sooppy Nisar, Ashraf Elfakhany, Emad M. Eed, and Hassan Ali S. Ghazwani. "Significance of induced hybridized metallic and non-metallic nanoparticles in single-phase nano liquid

flow between permeable disks by analyzing shape factor." *Scientific Reports* 12, no. 1 (2022): 1-16.

- [43] Qureshi, Zubair Akbar, Sardar Bilal, Imtiaz Ali Shah, Ali Akgül, Rabab Jarrar, Hussein Shanak, and Jihad Asad. "Computational Analysis of the Morphological Aspects of Triadic Hybridized Magnetic Nanoparticles Suspended in Liquid Streamed in Coaxially Swirled Disks." *Nanomaterials* 12, no. 4 (2022): 671.
- [44] Shah, Imtiaz Ali, Sardar Bilal, Ali Akgül, Mohamed Omri, Jamel Bouslimi, and Noor Zeb Khan. "Significance of cold cylinder in heat control in power law fluid enclosed in isosceles triangular cavity generated by natural convection: A computational approach." *Alexandria Engineering Journal* 61, no. 9 (2022): 7277-7290.
- [45] Amanulla, C. H., N. Nagendra, and M. Suryanarayana Reddy. "Numerical Simulations on Magnetohydrodynamic Non-Newtonian Nanofluid Flow Over a Semi-Infinite Vertical Surface with Slip effects." *Journal of Nanofluids* 7, no. 4 (2018): 718-730.
- [46] Nallagundla, Nagendra, C. H. Amanulla, and M. Suryanarayana Reddy. "Mathematical analysis of non-Newtonian nanofluid transport phenomena past a truncated cone with Newtonian heating." *Journal of Naval Architecture and Marine Engineering* 15, no. 1 (2018): 17-35.
- [47] Amanulla, C. H., N. Nagendra, and M. Suryanarayana Reddy. "Numerical simulation of slip influence on the flow of a MHD Williamson fluid over a vertical convective surface." *Nonlinear Engineering* 7, no. 4 (2018): 309-321.
- [48] Rao, S. A., C. H. Amanulla, N. Nagendra, M. Surya Narayana Reddy, and O. Anwar Beg. "Hydromagnetic non-Newtonian nanofluid transport phenomena past an isothermal vertical cone with partial slip: aerospace nanomaterial enrobing simulation." *Heat Trans Asian Res* (2017): 1-28.
- [49] Amanulla, C. H., N. Nagendra, and M. Suryanarayana Reddy. "Computational analysis of non-Newtonian boundary layer flow of nanofluid past a semi-infinite vertical plate with partial slip." *Nonlinear Engineering* 7, no. 1 (2018): 29-43.
- [50] Nagendra, N., B. Venkateswarlu, Z. Boulahia, C. H. Amanulla, and G. K. Ramesh. "Magneto Casson-Carreau Fluid Flow through a Circular Porous Cylinder with

Partial Slip." *Journal of Applied and Computational Mechanics* 8, no. 4 (2022): 1208-1221.

- [51] Ahmed, Sameh Elsayed. "FEM-CBS algorithm for convective transport of nanofluids in inclined enclosures filled with anisotropic non-Darcy porous media using LTNEM." *International Journal of Numerical Methods for Heat & Fluid Flow* (2020).
- [52] Hiba, Brahim, Fares Redouane, Wasim Jamshed, C. Ahamed Saleel, S. Suriya Uma Devi, M. Prakash, Kottakkaran Sooppy Nisar, V. Vijayakumar, and Mohamed R. Eid. "A novel case study of thermal and streamline analysis in a grooved enclosure filled with (Ag–MgO/Water) hybrid nanofluid: Galerkin FEM." *Case Studies in Thermal Engineering* 28 (2021): 101372.
- [53] Ali, Liaqat, Bagh Ali, and Muhammad Bilal Ghori. "Melting effect on Cattaneo–Christov and thermal radiation features for aligned MHD nanofluid flow comprising microorganisms to leading edge: FEM approach." *Computers & Mathematics with Applications* 109 (2022): 260-269.
- [54] Abderrahmane, A. I. S. S. A., Mohammad Hatami, M. A. Medebber, Sahraoui Haroun, Sameh E. Ahmed, and Sahnoun Mohammed. "Non-Newtonian nanofluid natural convective heat transfer in an inclined Half-annulus porous enclosure using FEM." *Alexandria Engineering Journal* 61, no. 7 (2022): 5441-5453.
- [55] Rana, Puneet, and Gaurav Gupta. "FEM Solution to quadratic convective and radiative flow of Ag-MgO/H₂O hybrid nanofluid over a rotating cone with Hall current: Optimization using Response Surface Methodology." *Mathematics and Computers in Simulation* (2022).
- [56] Pasha, P., and D. Domiri-Ganji. "Hybrid Analysis of Micropolar Ethylene-glycol Nanofluid on Stretching Surface Mounted Triangular, Rectangular and Chamfer Fins by FEM Strategy and Optimization with RSM Method." *International Journal of Engineering* 35, no. 5 (2022): 845-854.
- [57] Redouane, Fares, Wasim Jamshed, S. Devi, M. Prakash, Nor Ain Azeany Mohd Nasir, Zakia Hammouch, Mohamed R. Eid et al. "Heat flow saturate of Ag/MgO-water hybrid nanofluid in heated trigonal enclosure with rotate cylindrical cavity by using Galerkin finite element." *Scientific reports* 12, no. 1 (2022): 1-20.

- [58] Alrowaili, Dalal, Sameh E. Ahmed, Hillal M. Elshehabey, and Mohammed Ezzeldien. "Magnetic radiative buoyancy-driven convection of MWCNTs-C₂H₆O₂ power-law nanofluids in inclined enclosures with wavy walls." *Alexandria Engineering Journal* 61, no. 11 (2022): 8677-86
- [59] Zaaroura, Ibrahim, Hilal Reda, Fabrice Lefebvre, Julien Carlier, Malika Toubal, Souad Harmand, Bertrand Nongaillard, and Hassan Lakiss. "Modeling and Prediction of the Dynamic Viscosity of Nanofluids by a Homogenization Method." *Brazilian Journal of Physics* 51, no. 4 (2021): 1136-1144. 89.
- [60] Ahmed, Sameh E., and Muflih Alhazmi. "Impacts of the rotation and various thermal conditions of cylinders within lid-driven enclosures filled with glass balls in the presence of radiation: FEM simulation." *International Communications in Heat and Mass Transfer* 128 (2021): 105603.
- [61] Muhammad, Khursheed, T. Hayat, S. Momani, and S. Asghar. "FDM analysis for squeezed flow of hybrid nanofluid in presence of Cattaneo-Christov (CC) heat flux and convective boundary condition." *Alexandria Engineering Journal* 61, no. 6 (2022): 4719-4727.
- [62] Li, Hongtao, Jinggang Yang, Shan Gao, and Ke Zhao. "Multi-scale LBM-FDM Analysis on Natural Convection Heat Transfer and Metal Particle Movements Inside Gas Insulated Switchgear." In *The proceedings of the 16th Annual Conference of China Electrotechnical Society*, pp. 1217-1225. Springer, Singapore, 2022.
- [63] K. S. Mekheimer and S. F. Ramadan, "New insight into gyrotactic microorganisms for bio-thermal convection of Prandtl nanofluid over a stretching/shrinking permeable sheet", *SN Applied Sciences*, vol. 2, 450, 2020.
- [64] Qureshi, Imran Haider, M. Nawaz, M. A. Abdel-Sattar, Shaban Aly, and M. Awais. "Numerical study of heat and mass transfer in MHD flow of nanofluid in a porous medium with Soret and Dufour effects." *Heat Transfer* 50, no. 5 (2021): 4501-4515.
- [65] Reddy, M. Gnaneswara, and K. Ganesh Kumar. "Cattaneo-Christov heat flux feature on carbon nanotubes filled with micropolar liquid over a melting surface: a stream line study." *International Communications in Heat and Mass Transfer* 122 (2021): 105142.



- [66] Reddy, M. Gnaneswara, Naveen Kumar, B. C. Prasannakumara, N. G. Rudraswamy, and K. Ganesh Kumar. "Magnetohydrodynamic flow and heat transfer of a hybrid nanofluid over a rotating disk by considering Arrhenius energy." *Communications in Theoretical Physics* 73, no. 4 (2021): 045002.
- [67] Puneeth, V., S. Manjunatha, K. Ganesh Kumar, and Machireddy Gnaneswara Reddy. "Perspective of multiple slips on 3D flow of Al₂O₃-TiO₂-CuO/H₂O ternary nanofluid past an extending surface due to non-linear thermal radiation." *Waves in Random and Complex Media* (2022): 1-19.
- [68] Chaurasiya, Himanshu. "Cognitive hexagon controlled intelligent speech interaction system." *IEEE Transactions on Cognitive and Developmental Systems* (2022).
- [69] W. Jamshed and A. Aziz, Entropy Analysis of TiO₂-Cu/EG Casson Hybrid Nanofluid via Cattaneo-Christov Heat Flux Model, *Applied Nanosciences*, vol. 08, pp. 01-14, 2018.
- [70] W. Jamshed and K. S. Nisar, Computational single phase comparative study of Williamson nanofluid in parabolic trough solar collector via Keller box method, *International Journal of Energy Research*, vol. 45(7), pp. 10696-10718, 2021
- [71] W. Jamshed, S. U. Devi and K. S. Nisar, Single phase-based study of Ag-Cu/EO Williamson hybrid nanofluid flow over a stretching surface with shape factor, *Physica Scripta*, vol. 96, pp. 065202, 2021.
- [72] W. Jamshed, K. S. Nisar b, R. W. Ibrahim, F. Shahzad and M. R. Eid, "Thermal expansion optimization in solar aircraft using tangent hyperbolic hybrid nanofluid: a solar thermal application", *Journal of Materials Research and Technology*, vol. 14, pp. 985-1006, 2021.
- [73] W. Jamshed, K. S. Nisar, R. W. Ibrahim, T. Mukhtar, V. Vijayakumar and F. Ahmad, Computational frame work of Cattaneo-Christov heat flux effects on Engine Oil based Williamson hybrid nanofluids: A thermal case study, *Case Studies in Thermal Engineering*, vol. 26, pp. 101179, 2021.
- [74] W. Jamshed, S. R. Mishra, P. K. Pattnaik, K. S. Nisar, S. S. U. Devi, M. Prakash, F. Shahzad, M. Hussain and V. Vijayakumar, Features of entropy optimization on viscous second grade nanofluid streamed with thermal radiation: A Tiwari and Das model, *Case Studies in Thermal Engineering*, vol. 27, pp. 101291, 2021.

- [75] W. Jamshed, N. A. A. Mohd Nasir, S. S. P. Mohamed Isa, R. Safdar, F. Shahzad, K. S. Nisar, M. R. Eid, A.H, Abdel-Aty and I. S. Yahia, Thermal growth in solar water pump using Prandtl–Eyring hybrid nanofluid: a solar energy application, *Scientific Reports*, vol. 11, pp. 18704, 2021.
- [76] W. Jamshed, F. Shahzad, R. Safdar, T. Sajid, M. R. Eid and K. S. Nisar, Implementing renewable solar energy in presence of Maxwell nanofluid in parabolic trough solar collector: a computational study, *Waves in Random and Complex Media*, 2021.
- [77] W. Jamshed, Finite element method in thermal characterization and streamline flow analysis of electromagnetic silver-magnesium oxide nanofluid inside grooved enclosure, *International Communications in Heat and Mass Transfer*, vol. 130, pp. 105795, 2021.
- [78] W. Jamshed, C. Sirin, F. Selimefendigil, MD. Shamshuddin, Y. Altowairqi and M. R. Eid, Thermal Characterization of Coolant Maxwell Type Nanofluid Flowing in Parabolic Trough Solar Collector (PTSC) Used Inside Solar Powered Ship Application, *Coatings*, vol. 11(12), pp. 1552, 2021
- [79] W. Jamshed, N. A. A. Mohd Nasir, M. A. Qureshi, F. Shahzad, R. Banerjee, M. R. Eid, K. S. Nisar & S. Ahmad, Dynamical irreversible processes analysis of Poiseuille magneto-hybrid nanofluid flow in microchannel: A novel case study, *Waves in Random and Complex Media*, 2022
- [80] S. M. Hussain, B. S. Goud, P. Madheshwaran, W. Jamshed, A. A. Pasha, R. Safdar, M. Arshad, R. W. Ibrahim and M. K. Ahmad, Effectiveness of Nonuniform Heat Generation (Sink) and Thermal Characterization of a Carreau Fluid Flowing across a Nonlinear Elongating Cylinder: A Numerical Study, *ACS Omega* (2022).
- [81] A. A. Pasha, N. Islam, W. Jamshed, M. I. Alam, A. G. A. Jameel, K. A. Juhany and R. Alsulami, Statistical analysis of viscous hybridized nanofluid flowing via Galerkin finite element technique, *International Communications in Heat and Mass Transfer* 137(2022) 106244.
- [82] S. M. Hussain, W. Jamshed, A. A. Pasha, M. Adil and M. Akram, Galerkin finite element solution for electromagnetic radiative impact on viscid Williamson two-phase

nanofluid flow via extendable surface, *International Communications in Heat and Mass Transfer* 137(2022) 106243.

- [83] F. Shahzad, W. Jamshed, R. Safdar, N. A. A. Mohd Nasir, M. R. Eid, M. M. Alanazi and H.Y. Zahran, Thermal valuation and entropy inspection of second-grade nanoscale fluid flow over a stretching surface by applying Koo–Kleinstreuer–Li relation, *Nanotechnology Reviews*, 11(2022) 2061–2077.
- [84] W. Jamshed, M. R. Eid, R. Safdar, A. A. Pasha, S. S. P. Mohamed Isa, M. Adil, Z. Rehman & W. Weera, Solar energy optimization in solar-HVAC using Sutterby hybrid nanofluid with Smoluchowski temperature conditions: a solar thermal application, *Scientific Reports* 12(2022) 11484.
- [85] E. K. Akgül, A. Akgül, W. Jamshed, Z. Rehman, K. S. Nisar, M. S. Alqahtani, and M. Abbas, Analysis of respiratory mechanics models with different kernels, *Open Physics* 20(2022) 609– 615.
- [86] W. Jamshed, R Safdar, Z. Rehman, M. M. A. Lashin, M. Ehab, M. Moussa and A. Rehman, Computational technique of thermal comparative examination of Cu and Au nanoparticles suspended in sodium alginate as Sutterby nanofluid via extending PTSC surface, *Journal of Applied Biomaterials & Functional Materials* (2022) 1– 20.
- [87] M. Dhange, G. Sankad, R. Safdar, W. Jamshed, M. R. Eid, U. Bhujakkanavar, S. Gouadria and R. Chouikh, A mathematical model of blood flow in a stenosed artery with post-stenotic dilatation and a forced field. *Plos One* (2022).
- [88] M. Akram, W. Jamshed, B. S. Goud, A. A. Pasha, T. Sajid, M. M. Rahman, M. Arshad and W. Weera, Irregular heat source impact on Carreau nanofluid flowing via exponential expanding cylinder: A thermal case study, *Case Studies in Thermal Engineering* 36(2022) 102190.
- [89] F. Shahzad, W. Jamshed, A. Ahmad, R. Safdar, M. M. Alam and I. Ullah, Efficiency evaluation of solar water-pump using nanofluids in parabolic trough solar collector: 2nd order convergent approach. *Waves in Random and Complex Media*, (2022). DOI:10.1080/17455030.2022.2083265.
- [90] S. M. Hussain, W. Jamshed, R. Safdar, F. Shahzad, N. A. A. Mohd Nasir, I. Ullah, Chemical reaction and thermal characteristics of Maxwell nanofluid flow-through

solar collector as a potential solar energy cooling application: A modified Buongiorno's model. Energy and Environment. 2022, 1-29.